


WP-523x-CE 7.0 OS 1.0.1.7 Release Notes

Release Date: 06/14/2017


Key Features:

| Features | Supported | Description |
|---|-----------|---|
| Windows CE 7.0 Core OS | Yes | |
| OS Language | Yes | WP-523x-CE7 ML: Multi-language <ul style="list-style-type: none">- English- German- Russian- French- Spanish- Italian- Korean- Simplified Chinese- Traditional Chinese |
| .NET Compact Framework 3.5 | Yes | V3.5.7283.0 for Visual Studio .Net 2008 |
| SQL CE 3.5 | Yes | SQL CE 3.5 (3.5.5386.0) |
| FTP Server | Yes | |
| HTTP Server | Yes | |
| Telnet | Yes | |
| Printer | No | |
| Display Resolution | Yes | 1024*768, 800 * 600, 800*480, 640 * 480 |
| Touch Panel | Yes | Support for touch panels using the RS-232 and USB interfaces |
| XV board  | Yes | Supported modules: <ul style="list-style-type: none">XV107 (8 DI, 8 DO)XV107i (8 DI, 8 DO)XV110i (16 DI)XV111i (16 DO) |

Software and Hardware Compatibility

| Software | | Hardware | |
|------------------------------------|----------|------------------------------------|--------------------------------|
| OS | Eboot | V1.3 、 V1.4 、 V1.41 (256MB RAM) | V1.44 and later (512MB RAM) |
| V1.0.1.7 [06/14/2018] 512MB | V1.2.3.1 | N/A | Yes |
| V1.0.1.6 [09/26/2017] 512MB | V1.2.2.0 | N/A | Yes |
| V1.0.1.5 [03/20/2017] 512MB | V1.2.2.0 | N/A | Yes |
| V1.0.1.5 [03/20/2017] 256MB | V1.2.2.0 | Yes | N/A |
| V1.0.1.4 [03/10/2016] 512MB | V1.2.2.0 | N/A | Yes |
| V1.0.1.4 [03/10/2016] 256MB | V1.2.2.0 | Yes | N/A |
| V1.0.1.3 [11/26/2015] 256MB | V1.2.2.0 | Yes | N/A |
| V1.0.1.2 [10/16/2015] 256MB | V1.2.2.0 | Yes | N/A |
| V1.0.1.1 [05/20/2015] 256MB | V1.2.1.0 | Yes | N/A |

Determining the hardware version

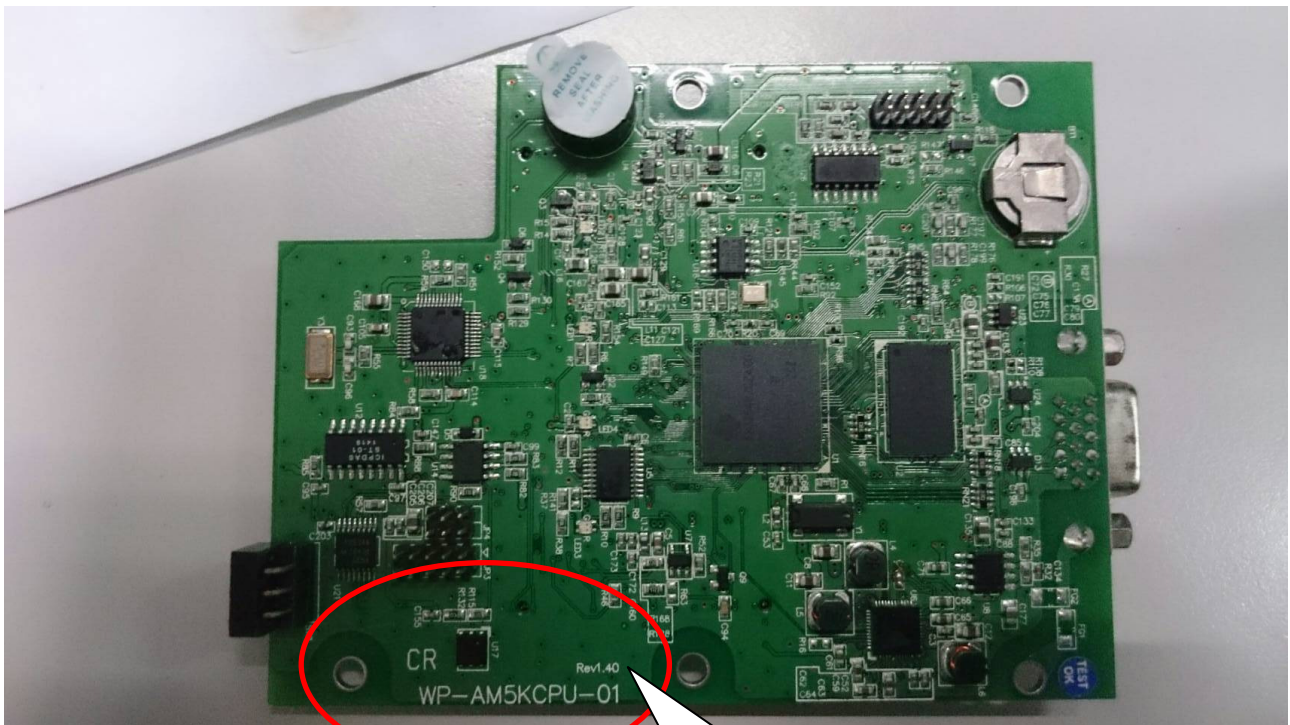

Revision mark for PCB v1.4 and later.

Table of Contents

WP-523x-CE7 OS 1.0.1.7 - Release Notes [06/14/2018]4

WP-523x-CE7 OS 1.0.1.7 - Release Notes [06/14/2018]

Abstract

This release fix the driver of “System_disk” to reduce the file write errors and the problem for sometimes the 3/4G modem does not work after reboot.

Improvements and Bug Fixes

- Fix the driver of “System_disk” to reduce the file write errors.
- Fix the problem for sometimes the 3/4G modem does not work after reboot.
(WP-5231PM-3GWA/4GE-CE7 serial)

Eboot 1.2.3.1 [06/15/2018]

- No change.

Software and Hardware Compatibility

| Software | | Hardware | |
|-----------------------------|----------|------------------------------------|--------------------------------|
| OS | Eboot | V1.3 、 V1.4 、 V1.41 (256MB RAM) | V1.44 and later (512MB RAM) |
| V1.0.1.7 [06/14/2018] 512MB | V1.2.3.1 | N/A | Yes |

WinPAC Utility and WinPAC SDK

- PACSDK DLL Version 4.4.0.7 (Released on 11/06/2017)
- PAC Utility Version 1.2.2.1 (Released on 11/07/2017)