

WP-8x3x Release Note

New OS released:

WP8x3x_20110322_Ver.1.2.0.3_en.exe (English)

WP8x3x_20110322_Ver.1.2.0.3_TC.exe (Traditional Chinese)

WP8x3x_20110322_Ver.1.2.0.3_SC.exe (Simplified Chinese)

Hardware Revision:


The MQ200 VGA chip was phased out, WP-8x3x replaces it with a SM107GF4 VGA chip since 2011, April, 6th. But the new VGA chip is not 100% compatible to the original one. Thus the OS and Eboot for WP-8x3x must be updated to version 1.2.0.3 and 1.2.1.0 to support both version of the VGA chip.

And please note, the older versions of OS and Eboot don't work on the WP-8x3x that is equipped with the SM107GF4 VGA chips. Don't install the earlier OS and Eboot to it, else it will not boot.

	Original MQ200 VGA Chip	New SM107GF4 VGA Chip
Eboot (Ver. 1.2.0.5 and earlier)	Ok	Not working
Eboot (Ver. 1.2.1.0 and later)	Ok	Ok
OS (Ver. 1.2.0.1 and earlier)	Ok	Not working
OS (Ver. 1.2.0.3 and later)	Ok	Ok

WP-8x3x Release Note

How to know the type of the Flash chips?
Visual Method

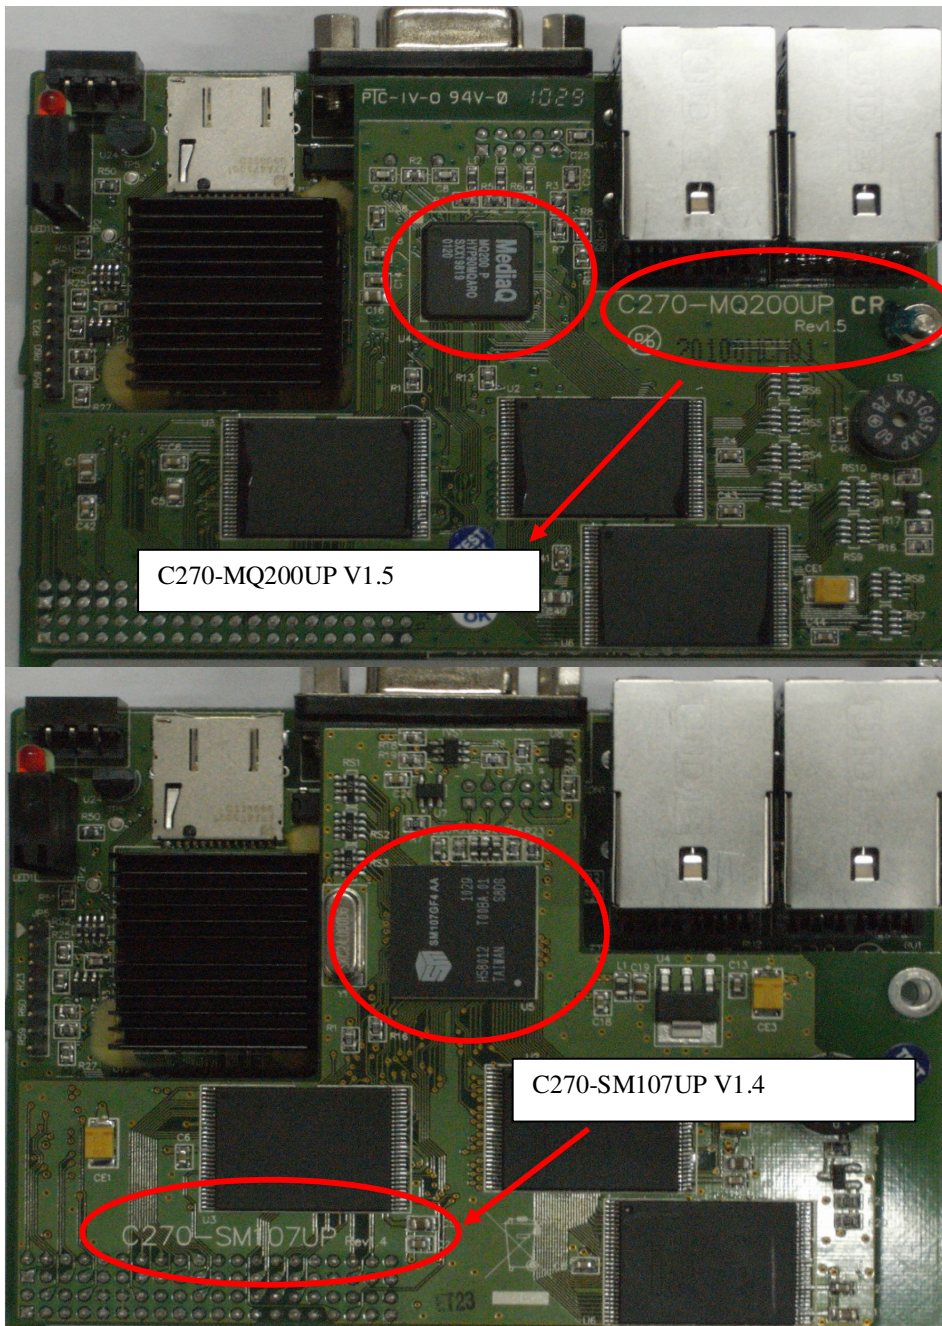

WP-8x3x 注意事項

發佈新版 OS:

WP8x3x_20110322_Ver.1.2.0.3_en.exe (英文版)

WP8x3x_20110322_Ver.1.2.0.3_TC.exe (繁體中文版)

WP8x3x_20110322_Ver.1.2.0.3_SC.exe (簡體中文版)

硬體改版:

MQ200 VGA Chip 已經停產，WP-8x3x 從 2011 年 4 月 6 日起，將使用另一個 SM107GF4 VGA Chip 進行取代。但是這個新的 VGA Chip 和原來的並不是 100% 相容，因此，必需將 OS 及 Eboot 更新到 1.2.0.3 及 1.2.1.0 版，以同時支援這兩種 VGA Chip。

但是必需注意的是，舊版的 OS (1.2.0.1)及 Eboot (1.2.0.5)在配備新版 VGA Chip 的 WP-8x3x 上將無法正常運作。請勿將舊版 Eboot 及 OS 安裝到配備新的 VGA Chip 的 WP-8x3x 上，以免造成無法開機的問題。

	原 MQ200 VGA Chip	新 SM107GF4 VGA Chip
Eboot (Ver. 1.2.0.5 and earlier)	Ok	Not working
Eboot (Ver. 1.2.1.0 and later)	Ok	Ok
OS (Ver. 1.2.0.1 and earlier)	Ok	Not working
OS (Ver. 1.2.0.5 and later)	Ok	Ok

WP-8x3x 注意事項

如何辨識新、舊版的 Flash Chip ?
肉眼判斷

