


# WP-523x-CE 7.0 OS 1.0.2.2 Release Notes

Release Date: 08/18/2022


## Key Features:

Features	Supported	Description
Windows CE 7.0 Core OS	Yes	
OS Language	Yes	<b>WP-523x-CE7 ML: Multi-language</b> <ul style="list-style-type: none"><li>- English</li><li>- German</li><li>- Russian</li><li>- French</li><li>- Spanish</li><li>- Italian</li><li>- Korean</li><li>- Simplified Chinese</li><li>- Traditional Chinese</li></ul>
.NET Compact Framework 3.5	Yes	V3.5.7283.0 for Visual Studio .Net 2008
SQL CE 3.5	Yes	SQL CE 3.5 (3.5.5386.0)
FTP Server	Yes	
HTTP Server	Yes	
Telnet	Yes	
Printer	No	
Display Resolution	Yes	1024*768, 800 * 600, 800*480, 640 * 480
Touch Panel	Yes	Support for touch panels using the RS-232 and USB interfaces
XV board 	Yes	Supported modules: <ul style="list-style-type: none"><li>XV107 (8 DI, 8 DO)</li><li>XV107i (8 DI, 8 DO)</li><li>XV110i (16 DI)</li><li>XV111i (16 DO)</li></ul>

# Software and Hardware Compatibility

Software		Hardware			
OS	Eboot	V1.3、V1.4、V1.41 (256MB RAM)	V1.44	V1.50	V1.80
			(512MB RAM)		
V1.0.2.2 [05/30/2022] <b>512MB</b>	V1.2.3.2	N/A	Yes	Yes	Yes
V1.0.2.1 [11/29/2021] <b>512MB</b>	V1.2.3.1	N/A	Yes	Yes	N/A
V1.0.1.8 [07/24/2018] <b>512MB</b>	V1.2.3.1	N/A	Yes	Yes	N/A
V1.0.1.7 [06/14/2018] <b>512MB</b>	V1.2.3.1	N/A	Yes	Yes	N/A
V1.0.1.6 [09/26/2017] <b>512MB</b>	V1.2.2.0	N/A	Yes	N/A	N/A
V1.0.1.5 [03/20/2017] <b>512MB</b>	V1.2.2.0	N/A	Yes	N/A	N/A
V1.0.1.5 [03/20/2017] <b>256MB</b>	V1.2.2.0	Yes	N/A	N/A	N/A
V1.0.1.4 [03/10/2016] <b>512MB</b>	V1.2.2.0	N/A	Yes	N/A	N/A
V1.0.1.4 [03/10/2016] <b>256MB</b>	V1.2.2.0	Yes	N/A	N/A	N/A
V1.0.1.3 [11/26/2015] <b>256MB</b>	V1.2.2.0	Yes	N/A	N/A	N/A
V1.0.1.2 [10/16/2015] <b>256MB</b>	V1.2.2.0	Yes	N/A	N/A	N/A
V1.0.1.1 [05/20/2015] <b>256MB</b>	V1.2.1.0	Yes	N/A	N/A	N/A

## Determining the hardware version

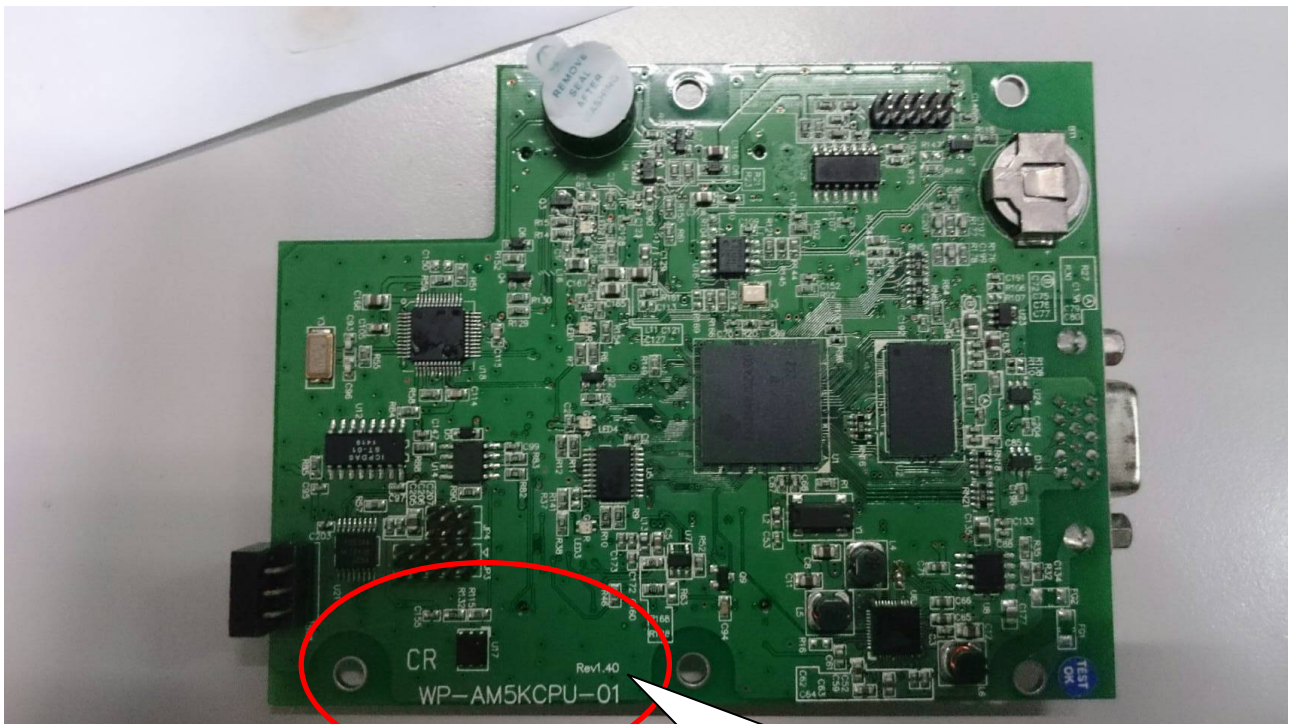

Revision mark for PCB v1.4 and later.

# Table of Contents

WP-523x-CE7 OS 1.0.2.2 - Release Notes [05/30/2022] .....4

# WP-523x-CE7 OS 1.0.2.2 - Release Notes [05/30/2022]

## Abstract

Support CPU hardware version V1.8.

The CPU hardware version V1.8 cannot boot by use OS V1.1.2.1 and before.

## New Features

- Support CPU hardware version V1.8.
- The “Run LED” will flash when setting the LAN1/2 “IP address” by “UDP Search” protocol.

## Eboot 1.2.3.2 [07/26/2022]

- Support CPU hardware version V1.8.

## Software and Hardware Compatibility

Software		Hardware			
OS	Eboot	V1.3、V1.4、V1.41 (256MB RAM)	V1.44	V1.50	V1.80
			(512MB RAM)		
V1.0.2.2 [05/30/2022] <b>512MB</b>	V1.2.3.2	N/A	Yes	Yes	Yes

## PAC Utility and PACSDK

- PACSDK DLL                   Version 4.5.0.3   (Released on 03/15/2021)
- PAC Utility                   Version 1.2.2.6   (Released on 03/15/2021)