




3Phase Smart Power Meter Calibration Report

Report number : EC20140157D

Issued date : 2014/07/24

Laboratory : Electrical and Temperature Calibration Laboratory
Address:No.6-6, Ronggong S Rd., Guanyin Township, Taoyuan
County 328, Taiwan, R.O.C.

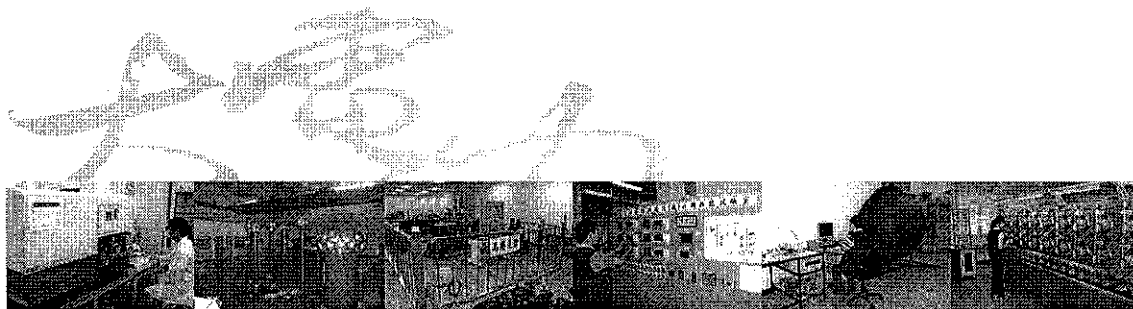

Taiwan Electric Research & Testing Center

Address:No.6-6, Ronggong S Rd., Guanyin Township, Taoyuan County 328, Taiwan, R.O.C.

TEL:886-3-483-9090

FAX:886-3-483-8119

E-mail:customer_service@ms.tertec.org.tw

Website:www.tertec.org.tw

- ◆ This report is calibration report.
- ◆ The testing result is only responsible to the tested sample.
- ◆ The report can be fully duplicated only. To excerpt any part of this report is invalid unless permitted by TERTEC.
- ◆ The contents on the report can not be used for advertisement, publication and merchandised activities.
- ◆ The report is invalid if without the seal on each page.
- ◆ Inquiry telephone:886-3-483-9090 ext. 8201



財團法人

台灣大電力研究試驗中心
Taiwan Electric Research & Testing CenterElectrical and Temperature Calibration Laboratory
Report No. : EC20140157D

Calibration Report

Applicant : ICP DAS Co.,Ltd

Issued Date : 2014/07/24

Address : No. 111, Guangfu N. Rd., Hukou Township,
Hsinchu County 30351, Taiwan, R.O.C.

Calibration Date : 2014/07/16

Equipment : 3Phase Smart Power Meter

Temperature : 23±2°C

Manufacturer : ICP DAS Co.,Ltd

Humidity : 50±10%

Model No. : PM-3133-100

Procedure Used : 60I-07-1812

Serial No. : PM3133ACR0A0FCP00001

Remark :

1. Calibration items with the same manufacturing number of the external CT (1, 2, 3,).
2. Calibration items RS485 communication interface and manufacturer of computer software (ICP DAS PM-3133-100, Version: V1.5) reader to indication value.

Calibration Standard			
Equipment	Manufacturer / Model No.	I.D. Number	Cal. Source / Cal. Date/ Report No/Cycle
Three Phase Standard	RADIAN/RD-30-231	300130	TERTEC / 103.03.25 / EC1030019 / 1 year

一、 Calibration Item & Result :

Alternating Current 60 Hz

Mold/resistance	Power Source Set Value				Standard Value(kW)	Indication Value(kW)	Error Value(%)	Uncertainty (%)
	Phase/Wire	Voltage(V)	Current(A)	P.F.				
CH1	1P2W	220	10	1.0	2.20000	2.2012	+0.06	0.19
CH1	1P2W	220	30	1.0	6.60000	6.6081	+0.12	0.19
CH2	1P2W	220	10	1.0	2.20000	2.2003	+0.01	0.19
CH2	1P2W	220	30	1.0	6.60000	6.6037	+0.06	0.19
CH3	1P2W	220	10	1.0	2.20000	2.1991	-0.04	0.19
CH3	1P2W	220	30	1.0	6.60000	6.5998	0	0.19

The report issued by : Bong-yem Lai

1. The testing result is only responsible to the tested sample. The report can be fully duplicated only. To excerpt any part of this report is invalid unless permitted by TERTEC.
2. The contents on the report can not be used for advertisement, publication and merchandised activities.

60T-07-1801D



Calibration Report

Alternating Current 50 Hz

Power Source Set Value					Standard Value(kW)	Indication Value(kW)	Error Value(%)	Uncertainty (%)
Mold/resistance	Phase/Wire	Voltage(V)	Current(A)	P.F.				
CH1	1P2W	220	1	1.0	0.22000	0.2201	+0.06	0.19
CH1	1P2W	220	5	1.0	1.10000	1.1004	+0.04	0.42
CH1	1P2W	220	10	1.0	2.20000	2.2013	+0.06	0.19
CH1	1P2W	220	30	1.0	6.60000	6.6056	+0.08	0.19
CH2	1P2W	220	1	1.0	0.22000	0.2200	0	0.19
CH2	1P2W	220	5	1.0	1.10000	1.0999	-0.01	0.19
CH2	1P2W	220	10	1.0	2.20000	2.1999	-0.01	0.19
CH2	1P2W	220	30	1.0	6.60000	6.5994	-0.01	0.19
CH3	1P2W	220	1	1.0	0.22000	0.2198	-0.11	0.19
CH3	1P2W	220	5	1.0	1.10000	1.0989	-0.10	0.19
CH3	1P2W	220	10	1.0	2.20000	2.1981	-0.08	0.19
CH3	1P2W	220	30	1.0	6.60000	6.5941	-0.09	0.19

Alternating Current 60 Hz

Power Source Set Value					Standard Value(kW)	Indication Value(kW)	Error Value(%)	Uncertainty (%)
Mold/resistance	Phase/Wire	Voltage(V)	Current(A)	P.F.				
CH4	3P3W	220	1	1.0	0.38100	0.3809	-0.03	0.19
CH4	3P3W	220	5	1.0	1.90500	1.9045	-0.03	0.19
CH4	3P3W	220	10	1.0	3.80900	3.8094	+0.01	0.19
CH4	3P3W	220	30	1.0	11.43200	11.4269	-0.04	0.19

Alternating Current 50 Hz

Power Source Set Value					Standard Value(kW)	Indication Value(kW)	Error Value(%)	Uncertainty (%)
Mold/resistance	Phase/Wire	Voltage(V)	Current(A)	P.F.				
CH4	3P3W	220	1	1.0	0.38100	0.3807	-0.08	0.28
CH4	3P3W	220	5	1.0	1.90500	1.9035	-0.08	0.19
CH4	3P3W	220	10	1.0	3.80900	3.8102	+0.03	0.19
CH4	3P3W	220	30	1.0	11.43200	11.4132	-0.16	0.19

二、Instruction :

1. Test method : according to Wattmeter calibration procedure, used of P,F source correction devices apply the watt/var Standard calculating the 1Phase Smart Power Meter error value(%).
2. $Error(\%) = ((E_{UUT} - E_{STD}) / E_{STD}) \times 100\%$, E_{UUT} : 1Phase Smart Power Meter Energy Standard , E_{STD} : Energy Standard
3. Expanded uncertainty the level of confidence is 95% and the coverage factor $k=2$.
4. Three phase compact smart Meter Energy used single phase two wire theorem.
5. The use of standard calibration devices traceable to national standards of weights and measurement laboratory and Pink Technology Co.Ltd (report No.E130546A, traceable data 2013.10.11, calibration cycle is one year).

60T-07-1803B