



WISE-7504M

WISE I/O Module with 4-channels AI, 4-channels AO, 4-channels DI and 2-port Ethernet Switch

Introduction

WISE (Web Inside, Smart Engine) is a product series developed by ICP DAS that functions as control units for use in remote logic control and monitoring in various industrial applications. By integrating with IF-THEN-ELSE rule engine, WISE-7504M provides more powerful functions such as I/O Monitoring/Control, Counter, Timer, Schedule, E-mail sending, CGI Command sending and Modbus TCP and MQTT protocol, and allows users to implement control logic on controllers just a few clicks away; no programming is required. WISE-7504M also can connect with ICP DAS IoTstar cloud management software for the services such as Remote Access and Sensor Data Collection.

WISE-7504M is a module with 4-channel analog inputs, 4-channel analog outputs and 4-channel digital inputs. It follows IEEE 802.3af-compliant Power over Ethernet (PoE) specification, and has a built-in two-port Ethernet switch to implement daisy-chain topology.

I/O Specifications

Analog Input		
Channels	4 (Differential)	
Type	+/-500 mV, +/-1 V, +/-5 V, +/-10 V, +0 mA to +20 mA, +/-20 mA, 4 to 20 mA (Jumper Selectable)	
Resolution	16-bit	
Sampling Rate	10 Samples/Second (Total)	
Accuracy	+/-0.1%	
Overvoltage Protection	240 Vrms	
Overcurrent Protection	50 mA Max. at 110 VDC/VAC Max.	
Common Voltage Protection	±200 VDC	
Virtual Channel to Channel Isolation	Yes, 400 VDC	
Open Wire Detection for 4 ~ 20 mA	Yes	
Input Impedance	Voltage	2 MΩ
	Current	125 Ω
Analog Output		
Channels	4	
Type	+0 VDC to +5 VDC, +/-5 VDC, +0 VDC to +10 VDC, +/-10 VDC, +0 mA to +20 mA, +4 mA to +20 mA (Jumper Selectable)	
Resolution	12-bit	
Accuracy	+/-0.1% of FSR	
Voltage Output Capability	20 mA @ 10 V	
Current Load Resistance	400 Ω	
Open Wire Detection	Yes, for 4 to 20 mA only	
Digital Input/Counter		
Channels	4	
Dry Contact (Source)	On Voltage Level	Open
	Off Voltage Level	Close to GND
	Effective Distance for Dry Contact	500 M Max.
Wet contact (Sink)	On Voltage Level	+1 VDC Max.
	Off Voltage Level	+3.5 VDC to +30 VDC
Counters	Max. Count	16-bit (65535)
	Max. Input Frequency	50 Hz
	Min. Pulse Width	10 ms
Overvoltage Protection	30 VDC	

Features

- No more programming, Web pages provided for system and logic rule setting.
- IF-THEN-ELSE logic rules execution ability.
- Built-in I/O
 - AI: 4 Channels; AO: 4 Channels; DI: 4 Channels
- Support I/O Monitoring/Control, Counter, Schedule, Timer, Email sending and CGI Command sending operations.
- Modbus TCP Protocol for SCADA System Integration.
- IEEE 802.3af-compliant Power over Ethernet (PoE).
- 2-port Ethernet Switch for Daisy-Chain Topology.
- MQTT Protocol for IT & IoT (Internet of Things) System Integration.
- Support connection with IoTstar Cloud Management Software




System Specifications

Communication	
Ethernet Port	2 x RJ-45, 10/100 Base-TX, Switch Ports
PoE	Yes
Protocol	Modbus TCP, MQTT
LED Indicators	
for System Running	Yes
for Ethernet Link/Act	Yes
for I/O Channel Status	Yes
for PoE Power	Yes
2-Way Isolation	
I/O	2500 VDC
EMS Protection	
ESD (IEC 61000-4-2)	±4 kV Contact for Each Terminal and ±8 kV Air for Random Point
EFT (IEC 61000-4-4)	±2 kV for Power Line
Surge (IEC 61000-4-5)	±2 kV for Power Line
Power	
Reverse Polarity Protection	Yes
Powered from Terminal Block	12 to 48 VDC
Powered from PoE	Yes, IEEE 802.3af, Class1
Consumption	5.1 W (Max.)
Mechanical	
Dimensions (L x W x H)	120mm x 97mm x 42mm
Installation	Wall mounting
Environment	
Operating Temperature	-25 °C to +75 °C
Storage Temperature	-30 °C to +80 °C
Humidity	10 to 90% RH, non-condensing

Software Specifications

Functions	
Rule Configuration Website	Access Web server on WISE controllers to edit and upload logic rules through web browser.
72 IF-THEN-ELSE Logic Rules	3 IF conditions with AND or OR operators 3 THEN actions and 3 ELSE actions
48 Internal Registers	Hold temporary variables and read/write data
24 Timers	Delay / Timing functions.
24 Schedules	Setup prescheduled routine tasks.
24 Emails	Send Email messages to pre-set Email receivers.
24 CGI Commands	Send pre-set CGI commands.
24 Recipes	Set up THEN/ELSE action groups.
8 P2P remote modules	Set up the connection information for the remote WISE modules.
Integration with SCADA/IT/IoT Systems	Support Modbus TCP and MQTT protocols for the integration with SCADA/IT/IoT systems. Support connection with ICP DAS IoTstar Cloud Management Software.

IF Conditions	
DI Channel	ON, OFF, ON to OFF, OFF to ON, Change
AI Channel	=, >, <, >=, <= (value)
Internal Register	=, >, <, >=, <= (value)
DI Counter	=, >, <, >=, <= (value), Change
Timer	Timeout, Not Timeout
Schedule	In Range, Out of Range
P2P	DI, AI, DI counter, DO counter, IR
Rule Status	Enable, Disable




THEN / ELSE Actions	
AO Channel	Change the value
Internal Register	Reset
DI Counter	Reset
Timer	Start, Reset
Schedule	Enable, Disable
Email	Send
MQTT message	Send
CGI Commands	Send
Recipe	Execute
P2P	DO(On/Off), AO, IR
Rule Status	Enable, Disable

Wire Connections

Voltage Input (Default)		
Current Input		
Voltage Output (Default)		
Current Output		
Digital Input/Counter	ON State Readback as 1	OFF State Readback as 0
Dry Contact		

Pin Assignments

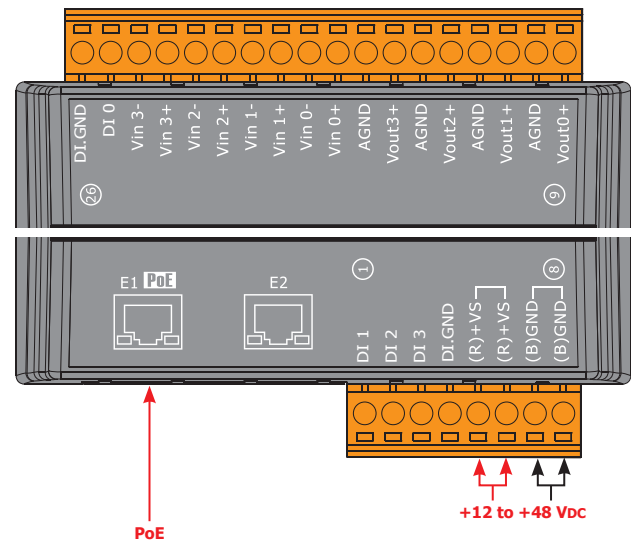

Ordering Information

WISE-7504M CR	WISE I/O Module with 4-channels AI, 4-channels AO, 4-channels DI and 2-port Ethernet Switch(RoHS)
----------------------	---

Accessories

GPSU06U-6	24V/0.25A, 6 W Power Supply
MDR-20-24	24V/1A, 24 W Power Supply with DIN-Rail Mounting
NS-205 CR	Unmanaged 5-Port Industrial Ethernet Switch (RoHS)
NS-205PSE CR	Unmanaged 5-Port Industrial PoE Ethernet Switch (RoHS)