



Features

- Powerful MCU handles efficient network traffic
- 2 x RJ-45 EtherCAT Connectors
- Integrate RS-232/422/485 serial device to EtherCAT
- Allows system integrators to retro-fit older automation devices into modern EtherCAT communication structures
- Requires no hardware or software changes to be made to the connected device
- Compatible with all PLCs with EtherCAT support
- Performs complete serial protocol conversion, no PLC function blocks required
- Supports maximum 256 WORD Input and 256 WORD Output Data
- Supports Serial Port interface
 - Supports Modbus RTU (Master) Protocol
 - Supports RS-232/422/485 Port
 - Supports Maximum Baud Rate 115200 bps



Introduction

Integrate your serial RS-232/422/485 based industrial devices and equipment to an EtherCAT control system without the need for any changes to the device. Just connect, configure and it's finished.

The ECAT-2610 Communicator is a proven and trusted protocol converter gateway that connects non-networked industrial devices and equipment to EtherCAT. The gateway performs an intelligent protocol conversion and presents the serial data to the Master PLC/Controller as easily processed I/O data.

* EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Hardware Specifications

Network Interface	
Protocol	EtherCAT
RJ-45 Port	RJ-45 x 1 Distance between Stations: Max. 100 m (100BASE-TX) Data Transfer Medium: Ethernet/EtherCAT Cable (Min. CAT 5e)
Communication Interface	
Protocol	Modbus RTU (Master)
Serial Interface	RS-232
	RS-422
	RS-485
The RS-232, RS-422 and RS-485 cannot be used simultaneously <ul style="list-style-type: none"> ▶ TxD, RxD, GND ▶ TxD+, TxD-, RxD+, RxD- ▶ Data+, Data- 	
Power	
Input Voltage Range	+12 ~ +48 VDC
Power Consumption	0.1 A @ 24 VDC
Protection	Power reverse polarity protection
Connector	3-Pin Removable Terminal Block (5.08 mm)
Mechanical	
Dimensions (H x W x D)	110 mm x 90 mm x 33 mm
Installation	DIN-Rail Mounting
Environment	
Operating Temperature	-25 ~ +75°C
Storage Temperature	-30 ~ +80°C
Relative Humidity	10 ~ 90% RH, Non-condensing

Pin Assignments


COM1 (Console Port)

Pin Assignment	Terminal No.	Pin Assignment
--	01	06
RxD	02	07
TxD	03	08
--	04	09
GND	05	--




COM2/COM3 (Modbus RTU)

Terminal No.	Pin Assignment
COM2	TxD+/D+
	TxD-/D-
	RxD+
COM3	RxD-
	N/A
	ISO.GND
	TxD
	RxD




EtherCAT Interface


Terminal No.	Pin Assignment
	F.G.
	GND(-)
	PWR(+)
	IN
	OUT



Applications

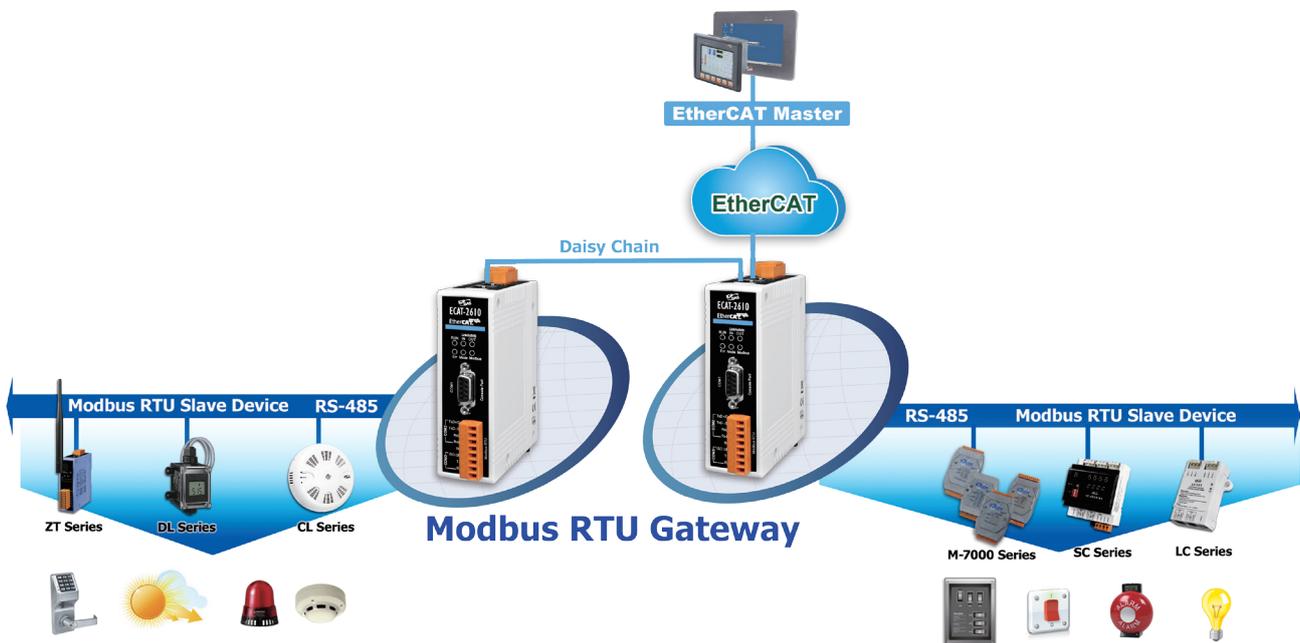

Dimensions (Units: mm)

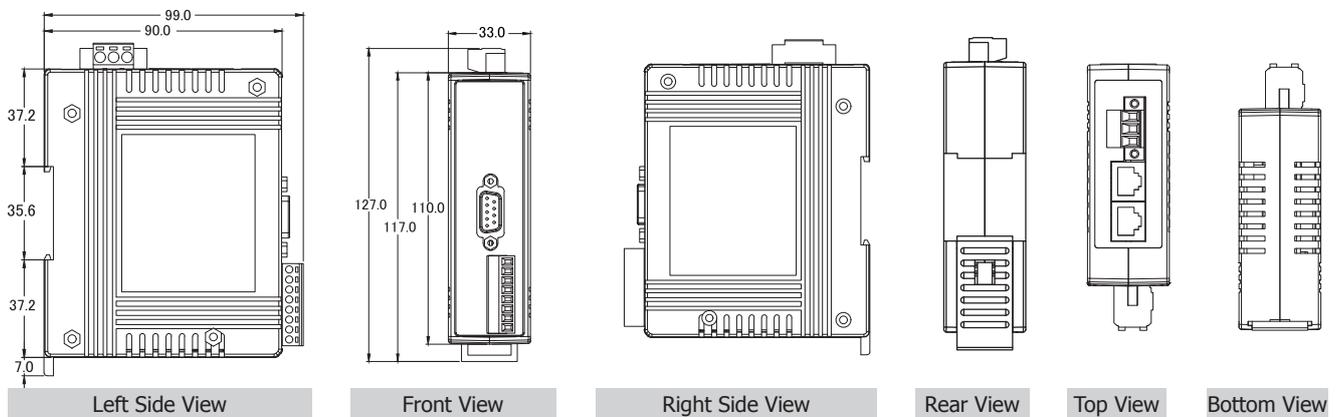

Ordering Information

ECAT-2610 CR	EtherCAT Slave to Modbus RTU Master Gateway (RoHS)
---------------------	--