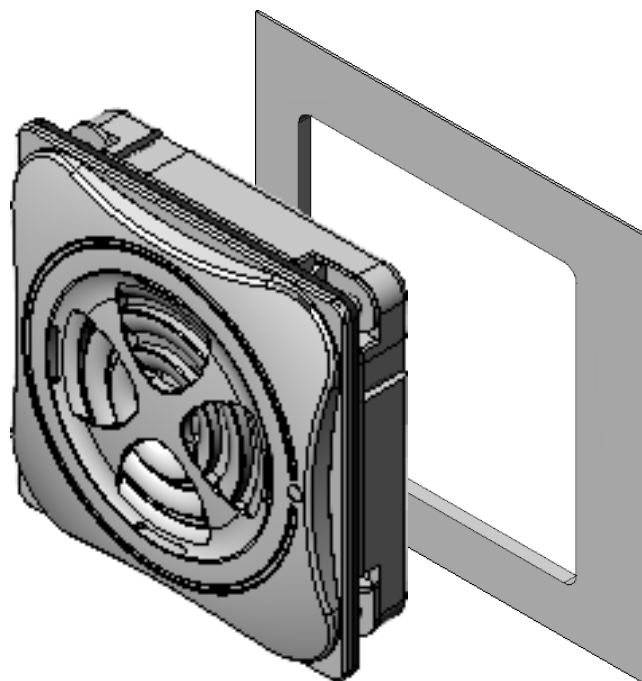This guide provides the procedures and instructions necessary to attach the ALM-06-WF on the panel.

1. Prepare a panel with a maximum thickness of 3 mm, and cut the hole to the specified size



67.2 mm

67.2 mm
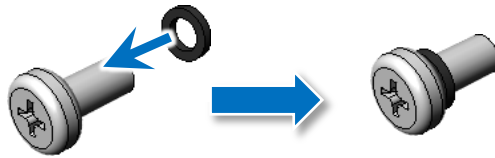
Panel thickness up to 3 mm
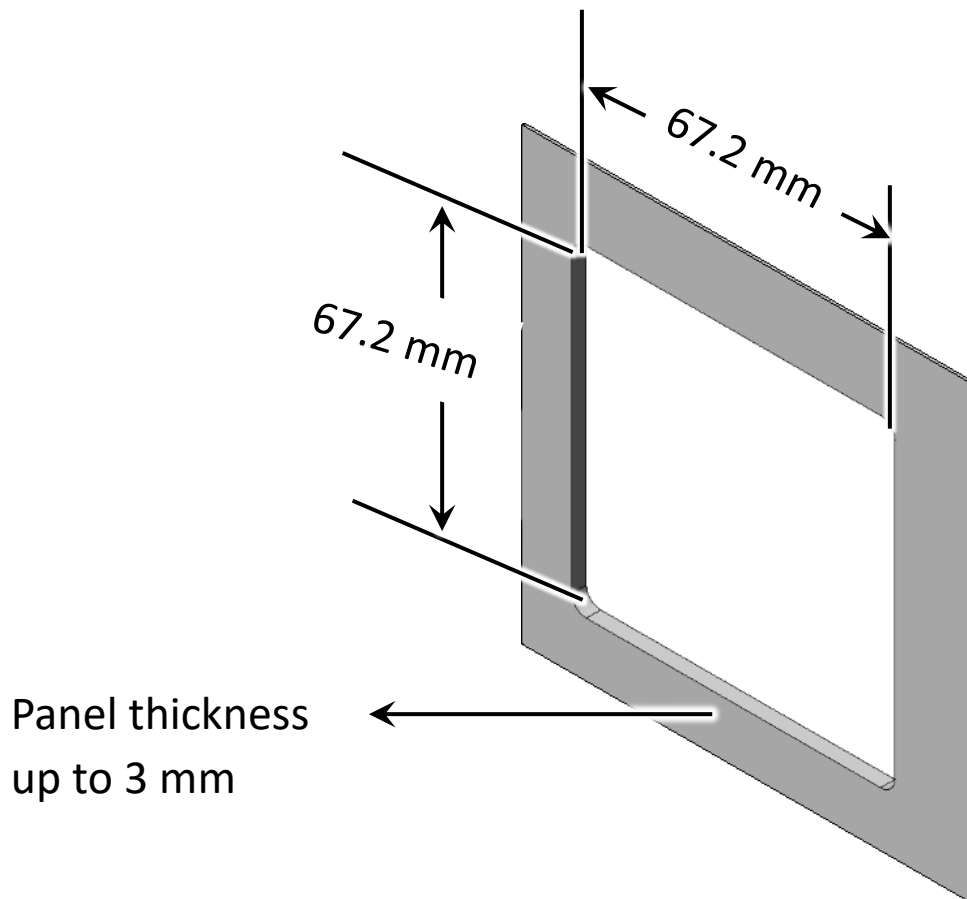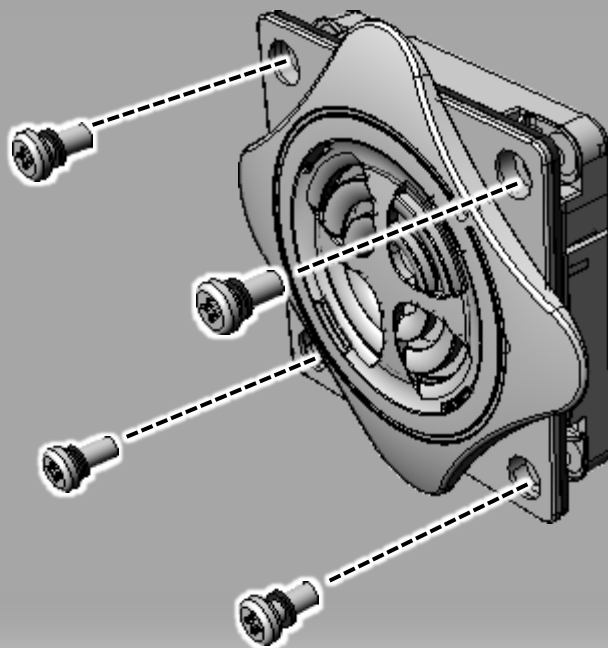
2. Attach the ALM-06-WF to the cut-out hole

3. Rotate the front cover counterclockwise until the screw hole appears
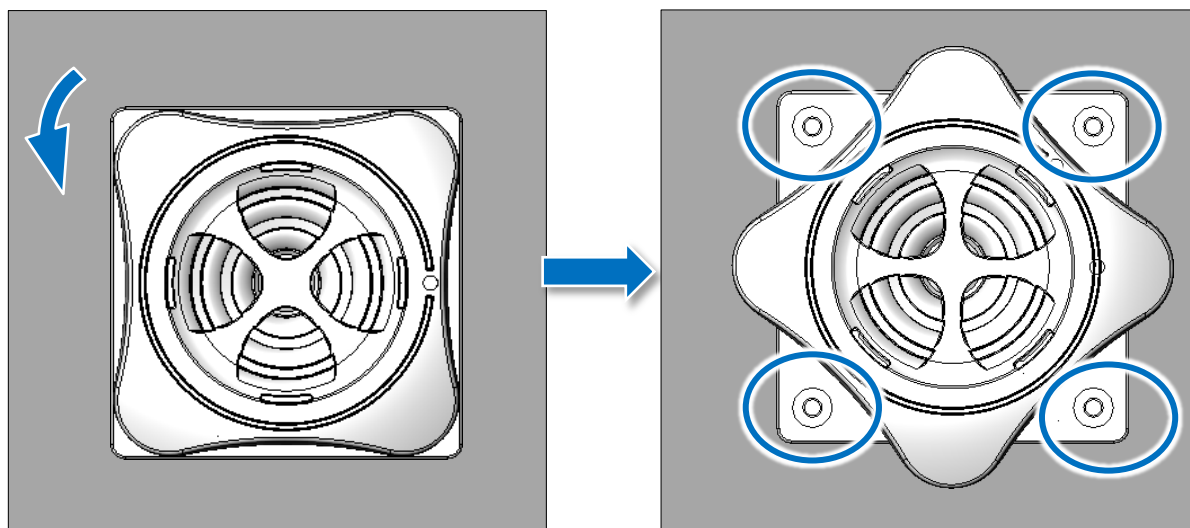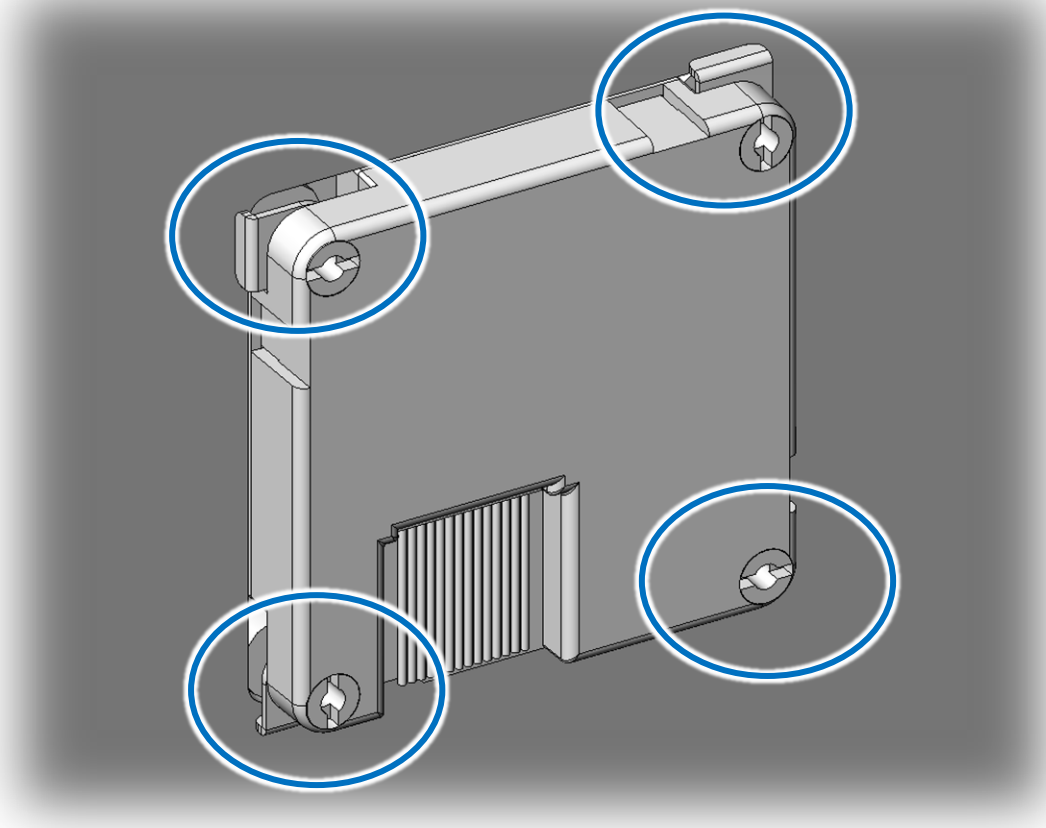
4. Wrap the **Gasket** around the **M4 screw**

5. Insert the screw into the screw hole

6. Make sure the panel clip is fitted and locked on the panel

## Technical Support

CD:\alm_cd\alm_06_wf\Manual

http://ftp.icpdas.com/pub/cd/alm_cd/alm_06_wf/manual/

service@icpdas.com