



SL-P6R1-WF SL-PA6R1-WF

Single Stack Light Monitoring Module with Wi-Fi Interface

■ Features

- Able to detect the status of each color segment: ON, OFF, or Flashing
- 6-channel DC/AC Digital Input and 1-channel alarm Relay Output
- Compatible with the IEEE802.11b/g/n standards
- Support infrastructure and limit-AP modes for wireless networks
- Status monitoring for user-defi ned combinations of multiple color segments
- Reports the duration of the previous and current status
- Supports the Modbus RTU, Modbus TCP and MQTT protocols
- Includes RS-485/Ethernet/Wi-Fi communication interfaces
- Includes redundant power inputs: PoE (IEEE 802.3af, Class 1) and DC input
- Web-based configuration interface and firmware update via Ethernet
- Relay Output for alarm devices
- Wide operating temperature range: -25 to +75°C









■ Introduction

The main purpose of managing the status of a machine is to reduce the amount of downtime while also reducing production costs. The easiest way to achieve this is by installing an SL-P6R1-WF/SL-PA6R1-WF intelligent module from ICP DAS, which monitors the output of the machine's indicators without affecting the operation of the equipment, thereby enabling the current operation stage of the machine to be mastered, which ensures timely command of the logistics system support in order to achieve production goals. The SL-P6R1-WF/SL-PA6R1-WF is a stack light monitoring module which includes 6-channel DC/AC Digital Input and 1-channel Relay Output that can be used to monitor the status of the stack lights on the MES (Manufacturing Execution System) machine.

The module can be used to detect the status of each color segment of the stack light to determine whether it is either OFF, ON, or flashing. In addition to detecting the status of each individual color segment, the status for a combination of multiple color segments can also be defined, including the ability to report the duration of the previous status. The SL-P6R1-WF/SL-PA6R1-WF includes WLAN connections that are compliant with the IEEE802.11b/g standards. With the popularity of 802.11 network infrastructure, the SL-P6R1-WF/SL-PA6R1-WF provides an easy method of incorporating wireless connectivity into the monitoring and control of your systems. It is easy to implement stack light status monitoring on an MES via SCADA software, thereby improving machine utilization and throughput. The SL-P6R1-WF/SL-PA6R1-WF also supports the Modbus/TCP and UDP protocols as well as network encryption configuration and offers easy and safe access for users at any time and from anywhere.

Applications

• Factory Automation

• Machine Automation

• Remote Maintenance

• Remote Diagnosis

• Testing Equipment

System Specifications

Model		SL-P6R1-WF	SL-PA6R1-WF	
Software				
Built-in Web Server		Yes		
Communication	1			
RS-485 Port		Baud Rate = 1200 ~ 115200 bps		
Ethernet Port		10/100 Base-TX, 8-Pin RJ-45 x1		
		(Auto-negotiating, Auto-MDI/MDIX, LED indicators) IP filter (whitelist) and Password (web)		
Security Protocol		Modbus/RTU(RS-485), Modbus TCP(Ethernet, Wi-Fi) and MQTT(Ethernet)		
Dual Watchdog		Yes, Module (2.3 seconds), Communication (Programmable)		
Wi-Fi Interface	1			
Antenna		5 dBi (OmniDirectional)		
Output Power		8 dBm @ 11 Mbps		
Receive Sensitivity		-83 dBm @ 11 Mbps		
Standard Supported		IEEE 802.11 b/g/n		
Wireless Mode		Infrastructure & Limit-AP		
Encryption		WEP, WPA and WPA2		
Transmission Range		50 meters (LOS)		
LED Indicators				
S1		System indicator		
E4		PoE indicator (Green)		
E1		Link/Act,(Yellow)		
Antenna		Signal Strength		
Isolation				
Intra-module Isolation, Field-to-Logic		3750 VDC		
EMS Protection	1			
ESD (IEC 61000-	4-2)	±4 kV Contact for Each Terminal		
L3D (ILC 01000-	T-2)	±8 kV Air for Random Point		
EFT (IEC 61000-4-4)		±2 kV for Power		
Power Require	ments			
Reverse Polarity Protection		Yes		
Power Input		Terminal Block: +10 ~ +48 VDC		
Power Input		PoE: IEEE 802.3af, Class 1		
Consumption	PoE	1.2 W Max.		
	Non-PoE	1 W Max.		
Mechanical				
Dimensions (W x L x H)		33 mm x 108 mm x 127 mm		
Installation		DIN-Rail Mounting		


Environment			
Operating Temperature	-25 to +75°C		
Storage Temperature	-30 to +80°C		
Humidity	10 to 95% RH, Non-condensing		

■ I/O Specifications


Model		SL-P6R1-WF	SL-PA6R1-WF	
Digital Input				
Input Channels		6		
Туре		Wet Contact (Sink, Source	2)	
ON Voltage Level		+10 V _{DC} ~ 50 V _{DC}	80 VAC ~240 VAC	
OFF Voltage Level		+4 V Max.	30 VAC Max.	
Input Impedance		10 KΩ, 0.5 W	150 KΩ, 2 W	
Max. Stack Light Flashin	g Speed	3 kHz	60 Hz	
Able to detect the status color segment: ON, OFF,		Yes		
Status monitoring for us combinations of multiple segments		Max. 81 combinations		
Report duration of previous	ous status	Yes, 10 ~ 65500 s		
Overvoltage Protection		70 VDC	300 VAC	
Isolation		3750 VDC		
Digital Output				
Output Channels		1		
Туре		Power Relay, Form A (SPST N.O.)		
Operating Voltage Range	2	250 VAC or 30 VDC		
Max. Load Current		5 A		
Operate Time		6 ms		
Release Time		3 ms		
	VDE	5 A @ 250 VAC 30,000 ops (10 ops/minute) at 75°C		
Electrical Life		5 A @ 30 V _{DC} 70,000 ops (10 ops/minute) at 75°C		
(Resistive load)	UL	5 A @ 250 VAC/30 VDC 6,000 ops		
		3 A @ 250 VAC/30 VDC 100,000 ops		
Mechanical Life		20,000,000 ops at no load (300 ops/minute)		
Power-on Value		Yes, Programmable		
Safe Value		Yes, Programmable		


ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2019.09 1/4


Applications

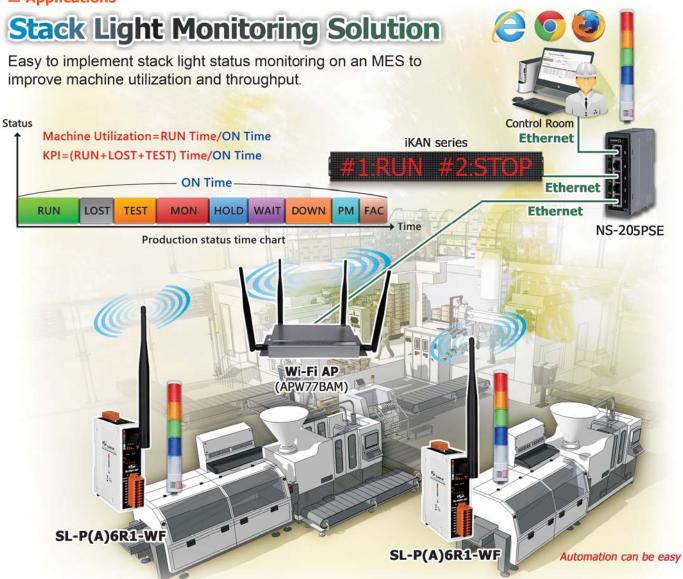

■ Pin Assignments

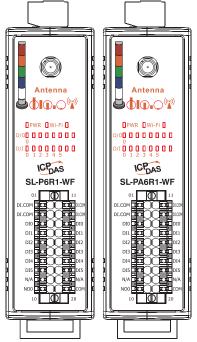

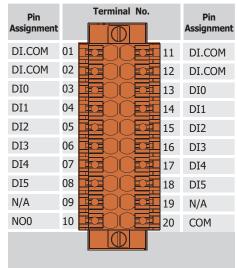


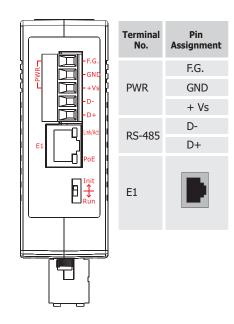


ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2019.09 2/4




Wire Connections

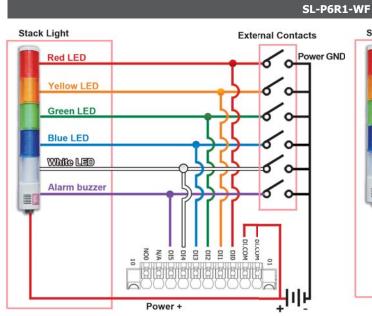

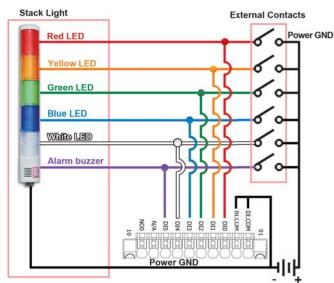


Stack Light External Contacts Red LED Yellow LED Blue LED White LED Alarm buzzer Power +

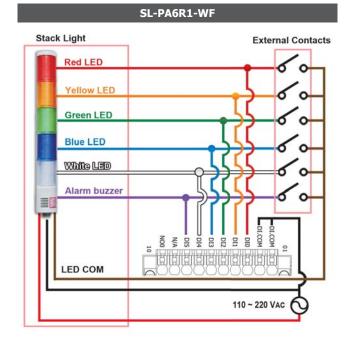


■ Related Products

tM-7520U CR	Isolated RS-232 to RS-485 Converter (RoHS)
tM-7561 CR	Isolated USB to RS-485 Converter (RoHS)
I-7514U CR	4-channel RS-485 Hub (RoHS)

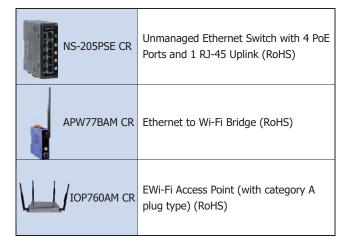

ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2019.09 3/4

■ Dimensions (Units: mm)

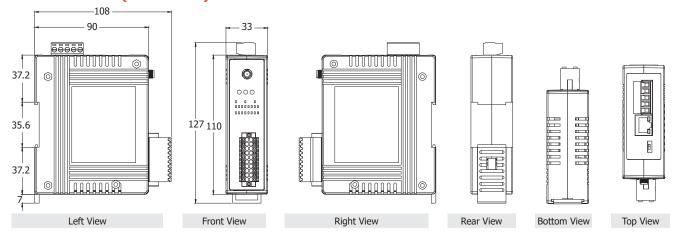

■ Ordering Information

SL-P6R1-WF CR	Single Stack Light Monitoring Module with Ethernet/RS-485/Wi-Fi Interfaces and PoE for DC Stack Lights. (6 DC DI + 1 Relay) (RoHS)
SL-PA6R1-WF CR	Single Stack Light Monitoring Module with Ethernet/RS-485/Wi-Fi Interfaces and PoE for AC Stack Lights. (6 AC DI + 1 Relay) (RoHS)

Accessories

Antenna Extension Cable					
35001-1	RG58A/U 1 Meter RP-SMA Male to RP-SMA Female	35005-1	RG58A/U 5 Meter RP-SMA Male to RP-SMA Female		
35003-1	RG58A/U 3 Meter RP-SMA Male to RP-SMA Female	35008-1	RG58A/U 8 Meter RP-SMA Male to RP-SMA Female		

External Antenna			
ANT-8	8 dBi 2.4 GHz External Antenna (OmniDirectional)	ANT-18	18 dBi 2.4 GHz External Antenna (Directional)
ANT-15	15 dBi 2.4 GHz External Antenna (OmniDirectional)	ANT-21	21 dBi 2.4 GHz External Antenna (Directional)
ANT-15YG-1	15 dBi 2.4 GHz External Antenna (Directional)		

ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2019.09 4/4