| Classification | Ethernet Applic | No. | 3-003-00 | | | | |
|----------------|-----------------|---------|----------|------|------------|------|-----|
| Author | WeiKai | Version | 1.0.0 | Date | 2011/04/07 | Page | 1/2 |

How to set up the Web server


| Applie | es to: | | | | |
|--------|-------------|-----------------------|----------------------|--|--|
| | Platform | OS version | XPAC utility version | | |
| | XPAC series | All versions (WinCE6) | All versions | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

The web sever is always active on the XPAC, so you can use browser connect to XPAC.

To configure root directory, perform the following steps:

Change root directory

Step 1: Execute the XPAC Utility, and then select "Network" Page, and then click "..." button.

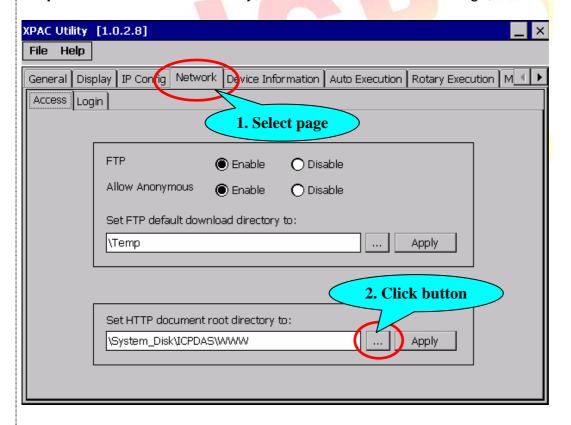

| Classification | Ethernet Applic | No. | 3-003-00 | | | | |
|----------------|-----------------|---------|----------|------|------------|------|-----|
| Author | WeiKai | Version | 1.0.0 | Date | 2011/04/07 | Page | 2/2 |

Step 2: Click "..." button will show following dialog, and you can select other root directory for web server.



Step 3: If you change root directory, Click "Apply" button and reboot your XPAC for take effect.

