

**ICPDAS™**

**M - 4 1 3 2**

User's Manual  
*Version 1.60*



## **Warranty**

All products manufactured by ICP DAS are under warranty regarding defective materials for a period of one year from the date of delivery to the original purchaser.

## **Warning**

ICP DAS assumes no liability for damages resulting from the use of this product. ICP DAS reserves the right to change this manual at any time without notice. The information furnished by ICP DAS is believed to be accurate and reliable. However, no responsibility is assumed by ICP DAS for its use, or for any infringements of patents or other right of third parties resulting from its use.

## **Copyright**

Copyright 2014 by ICP DAS. All rights are reserved.

## **Trademark**

The names used for identification only may be registered trademarks of their respective companies.

## **List of Revision**


<b>Date</b>	<b>Author</b>	<b>Version</b>	<b>Revision</b>
<b>2014/05/22</b>	<b>Raiden</b>	<b>1.60</b>	<b>Release</b>

# Table of Contents


1.	Introduction.....	4
1.1	Features .....	5
1.2	Hardware Specifications .....	6
2.	Hardware.....	8
2.1	Pin Assignment .....	8
2.2	Wiring Instructions.....	10
2.3	Dip Switch and Trigger button .....	12
2.4	LED Status Indicators .....	14
2.5	Communication Port .....	15
3.	Configuration and Operation with Web Browser.....	16
3.1	Connection Setting.....	16
3.2	Web Configuration—function menu .....	20
3.3	Web Configuration—setup page.....	22
4.	Application.....	48
4.1	Pair Connection .....	48
4.2	Broadcast Connection .....	49
4.3	ETM Operation .....	50
5.	VxComm Applications.....	52
5.1	Introduction .....	52
5.2	Architecture .....	52
5.3	Installing the VxComm Driver .....	53
5.4	VxComm communication test .....	56
6.	Troubleshooting.....	58
7.	FAQ.....	59
8.	Dimensions.....	70

# 1. Introduction

The M-4132 module is specially designed for the remote maintenance solution with voice streaming. This module provides 2 major technologies on networking: Voice streaming and Pair connection functions. The Pair connection means that the user can operate remote COM port device via Ethernet TCP/IP protocol just like a local COM port and the Voice streaming means the user can talk to remote operator while operate remote COM-linked devices. Refer to the following graph. Furthermore, M-4132 integrates the Virtual com technology. That can resolve the insufficiency of real com port in PC. By applying this technology, the maintenance man can take the remote maintenance or monitor whatever time or place.

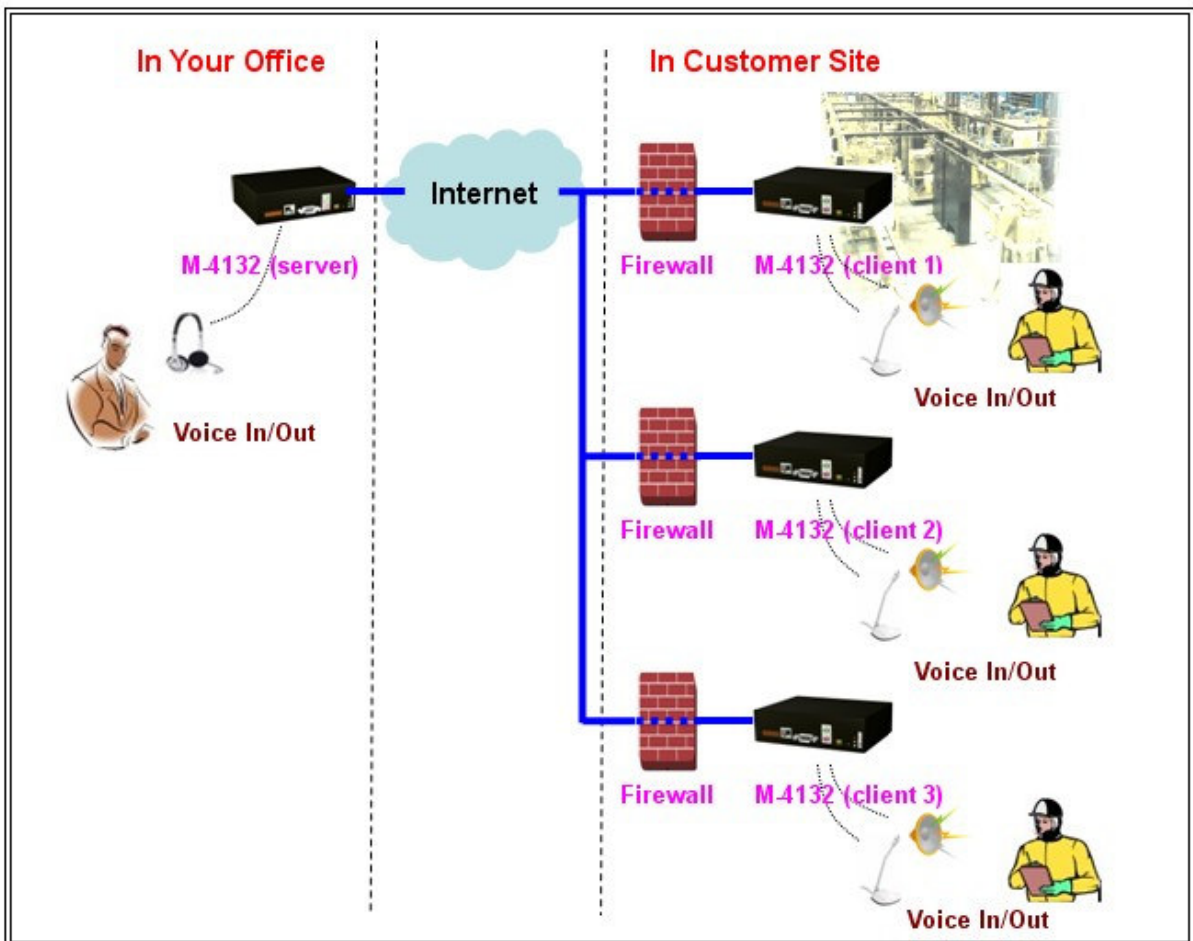

*Figure 1: Voice streaming*

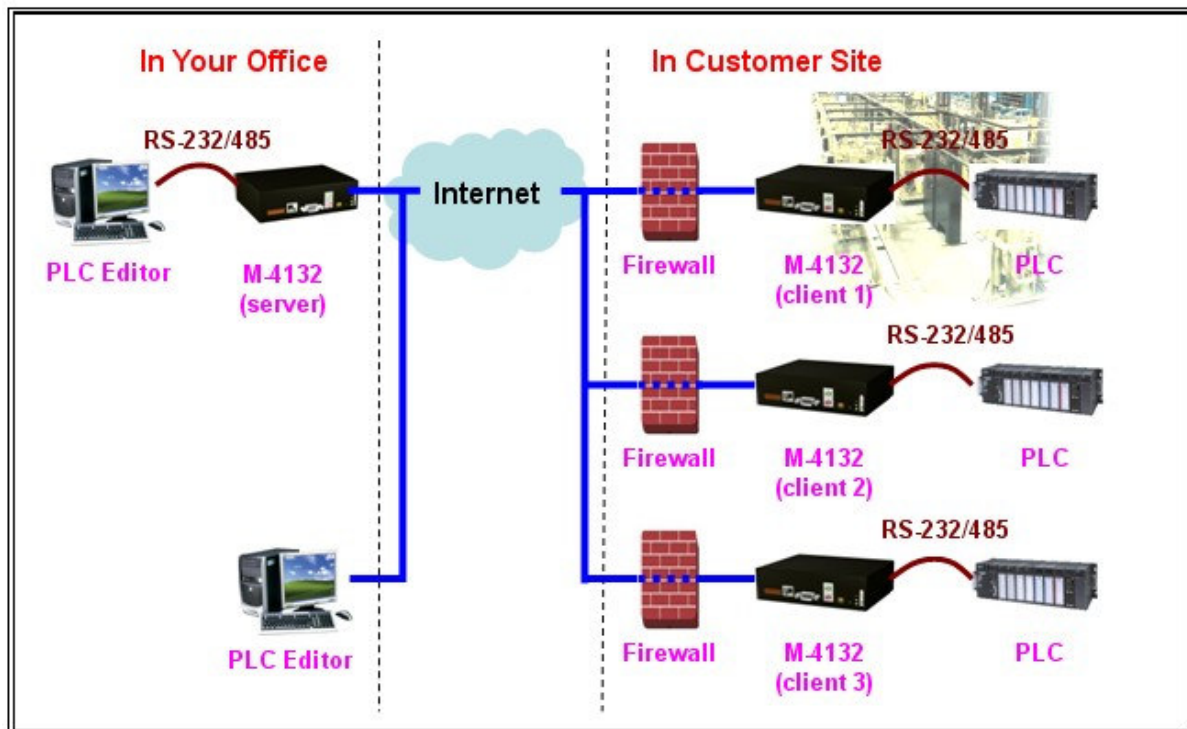

*Figure 2: Pair connection*

## 1.1 Features

- Support voice streaming on network
- Provide pair connection (RS-232,RS-485) on network
- Support server and client function.
- Server mode can manage max 64 clients. (Clients can be M-4132, M2M-720-A, M2M-710D..)
- Support voice broadcast function in server mode.
- Support Virtual COM technology
- Support VPN (Virtual Private Network) technology
- Support DES/AES encryption and decryption
- Web-based administration
- Linux 2.6 platform
- Support TCP/IP, DHCP, PPPoE protocols
- Provide dynamic DNS function to resolve the problem without the fixed real IP
- Provide event record and e-mail function
- Built-in web server, FTP server
- Built-in RTC

- Built-in self-tuner ASIC chip for RS-485 port
- 2500V isolated on RS-485 port
- Provide LED indicators
- Robust, fan less design
- CE/FCC, EMI, RoHS compliance

## 1.2 Hardware Specifications

<b><i>Item</i></b>	<b><i>Description</i></b>
<i>CPU</i>	<i>xScale PXA-255, 400 MHz processor</i>
<i>Memory</i>	<i>SDRAM: 64 MB Flash: 32 MB SRAM:256 KB</i>
<i>Ethernet</i>	<i>Ethernet Speed: 10/100M Ethernet interface: RJ-45 connector Internet connection type: DHCP, Static IP, PPPoE Ethernet protocols &amp; services: TCP/IP, Web server, FTP server, Telnet &amp; ssh</i>
<i>Audio</i>	<i>Provide microphone input and stereo speaker output Microphone and speaker interface: 3.5mm 3-pin phone jack Volume and tone quality adjustable</i>
<i>Com port</i>	<i>Serial port - RS-232/ RS-485 COM1:RS-232 interface -- D-sub 9-pin male RS-232: TXD, RXD, RTS, CTS, GND COM2:RS-485 interface -- 2-pin screw terminal block RS-485: D+, D-, self-tuner ASIC inside  Baud Rate : 1200/2400/4800/9600/19200/38400/57600/115200 bps Data Format: 5/6/7/8 data bits, None/Odd/Even parity bit, 1/2 stop bit</i>
<i>Power requirement</i>	<i>Unregulated +10V ~ +30V DC Power consumption 2.5W</i>
<i>Environmental</i>	<i>Operating temperature: -20 ~ 60 °C Storage temperature: -25 ~ 85 °C</i>

	<i>ESD protection: 2500V</i> <i>CE/FCC, EMI, RoHS compliance</i>
<i>Dimensions</i>	<i>160 x 135 x 44 (mm)</i>

## 2. Hardware

### 2.1 Pin Assignment



*Figure 3: Pin assignment of M-4132*

*Table 1: 7-pin screw terminal block*

Pin	Name	Description
1	T.GND	GND of trigger input
2	Trig	Trigger input
3	D+	Data+ of RS-485
4	D-	Data- of RS-485
5	PWR	V+ of Power Supply (+10 to +30VDC)
6	GND	GND of Power Supply
7	F.G.	Frame Ground



Table 2: RJ-45 socket

Pin	Name	Description
1	TX+	TX+ output
2	TX-	TX- output
3	RX+	RX+ input
4	-	N/A
5	-	N/A
6	RX-	RX- input
7	-	N/A
8	-	N/A




Table 3: RS-232 DB9 Female Connector

Pin	Name	Description
1	DCD(CD)	(Data) Carrier Detect
2	RXD	Received Data
3	TXD	Transmitted Data
4	DTR	Data Terminal Ready
5	GND	Signal Ground/Common
6	DSR	Data Set Ready
7	RTS	Request to Send
8	CTS	Clear to Send
9	-	N/A


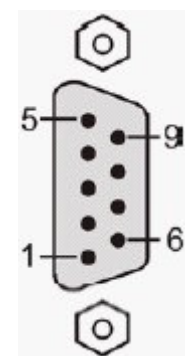



Table 4: 3.5mm Phone Jack (Speaker Out)

Pin	Name	Description
1	GND	Ground
2	Tip	Left channel
3	-	N/A
4	-	N/A
5	Ring	Right channel



*Table 5: 3.5mm Phone Jack (Microphone In)*

Pin	Name	Description
1	GND	Ground
2	Tip	Input Signal
3	-	N/A
4	-	N/A
5	Ring	Ground




## 2.2 Wiring Instructions

The communication interface of M-4132 includes RS-232, RS-485 and Ethernet. The wiring instructions are described in section 2.2.1, 2.2.2 and 2.2.3.

### 2.2.1 RS-232 connection

There are two types of RS-232 ports, DTE (Data Terminal Equipment, like M2M series, PC, Serial Printers, PLC and Video Cameras) and DCE (Data Circuit-Terminating Equipment, like modem) type, and that the signal names and pin numbers are the same, but signal flow is opposite!

The M-4132 module is a DTE and the user can use “3-wire” RS-232 or “5-wire” RS-232 to connect. When connecting the M-4132 to a DCE device, the user just needs to match the signal names. When connecting the M-4132 to a DTE device, the user needs to use a crossover cable (TX crosses to RX, GND to GND,), as shown in the figure 4, 5.

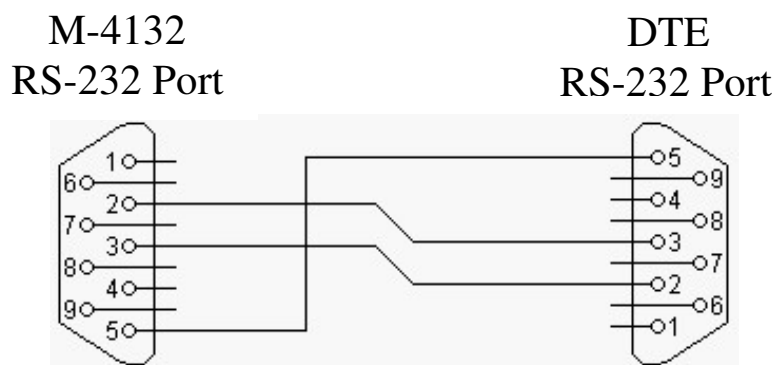

*Figure 4: “3-wire” RS-232 (M-4132 to DTE)*

M-4132  
RS-232 Port

DTE  
RS-232 Port

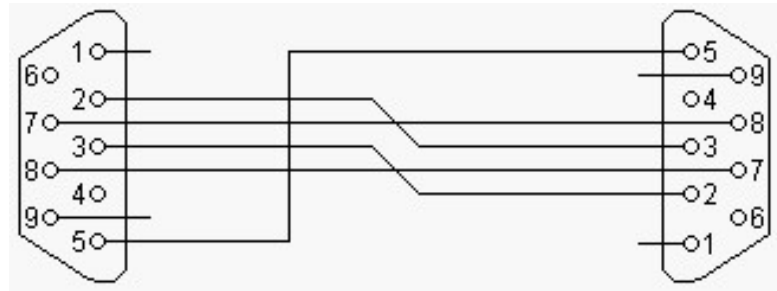


Figure 5: “5-wire” RS-232 (M-4132 to DTE)

### 2.2.2 RS-485 connection

The RS-485 wiring diagram is shown in figure 6.


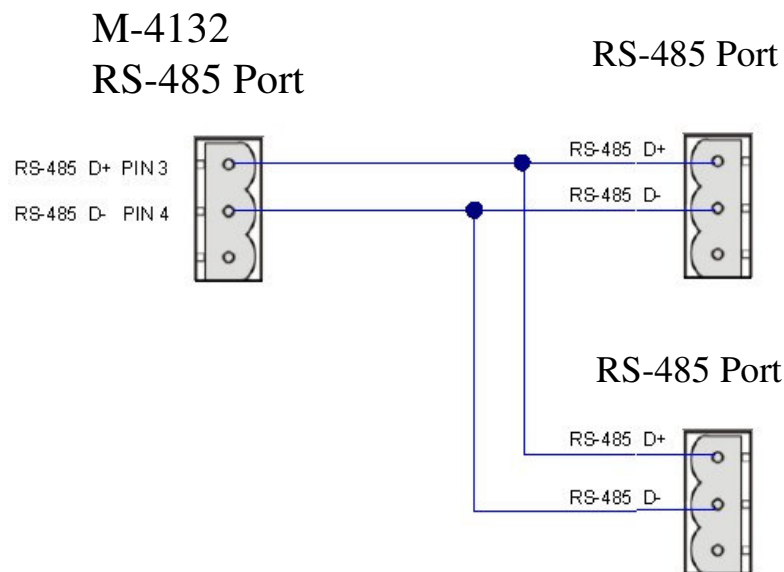


Figure 6: RS-485 connection

### 2.2.3 Ethernet connection

The M-4132 module is based on a client-server architecture model. When the M-4132 works as a server in Internet, it should set the firewall before the M-4132 module appropriately or else the client will not connect to the server.

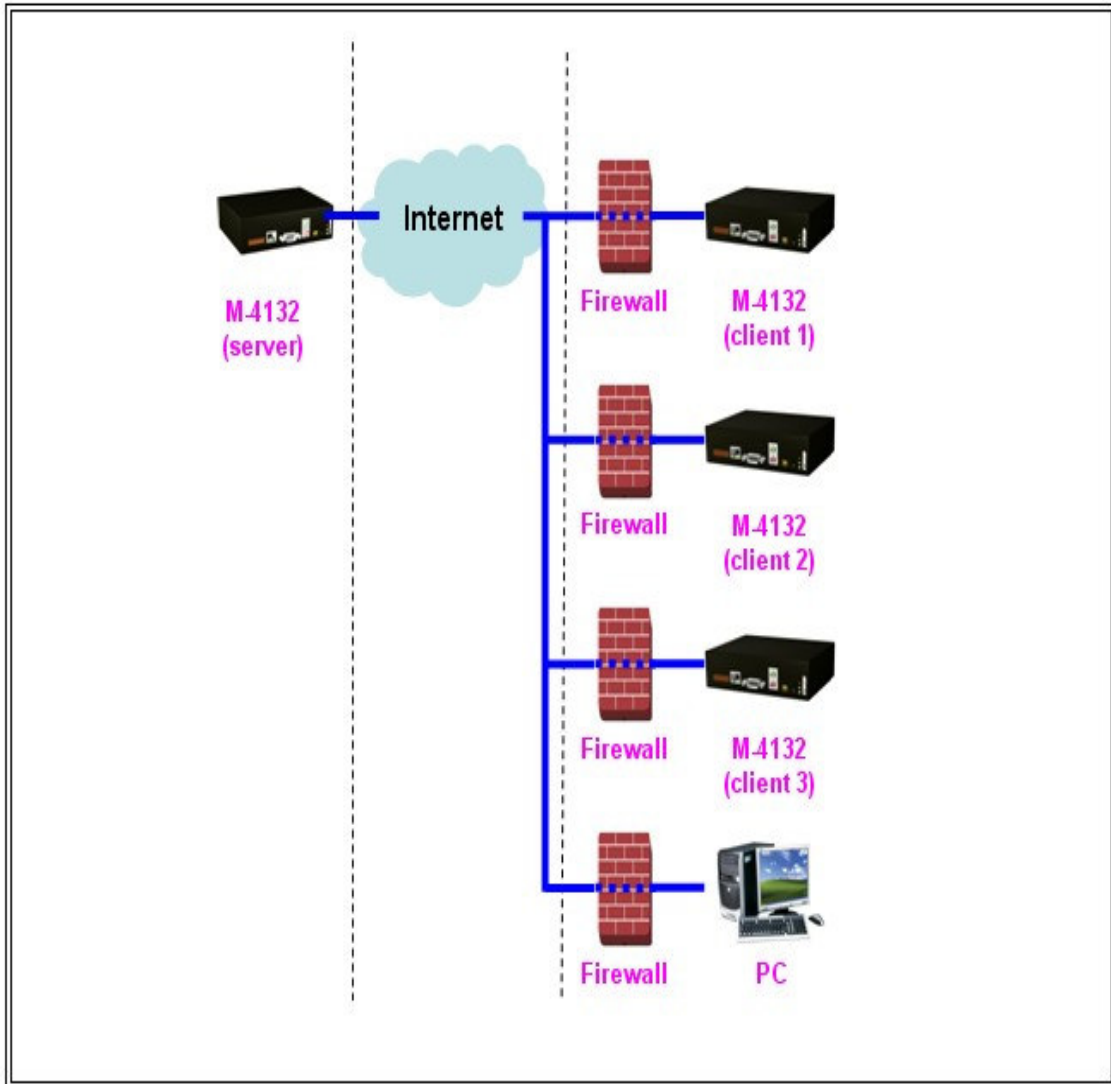

*Figure 7: Ethernet connection*

### 2.3 Dip Switch and Trigger button

The M-4132 provides two switches (SW1, SW2) and a trigger button (TB). These switches and button can decide initial function of the system after power on and enable/disable the request to connect. The descriptions are shown in table 6, 7.



*Figure 8: Dip Switch and Trigger Button*

*Table 6: Dip switch and trigger button for initial function*

Option	State	Description
Recover default setting forever	SW2=ON SW1=ON To press the TB about 40 second after power on	All system settings will be cleared and recover default settings. (Warning: it will not restore settings after clear)
IP recover default setting for this time	SW2= OFF SW1= ON To press the TB about 40 second after power on	After power on, it will set IP to default setting (192.168.1.217) for this time, but it will restore original IP at next time.
IP recover default setting forever	SW2= ON SW1= OFF To press the TB about 40 second after power on	After power on, it will set IP to default setting (192.168.1.217) and save to flash.
Display the current IP and version	SW2=OFF SW1=OFF To press the TB about 40 second after power on	After power on, it will display the message about current IP and version information from Com Port(RS-232).
Normal setting	The other states	Normal state; It will not change any setting and data.

*Table 7: Dip switch and trigger button for the request*

Option	State	Description
Disable the request to connect	SW2=OFF SW1=OFF Press the TB	Client: Send the request to disconnect. The voice and com port connection will be disconnected, but the login connection will hold on.
Enable the request to connect	SW2=ON SW1=ON Press the TB	Client: request server to connect.

## 2.4 LED Status Indicators

The M-4132 provides three LEDs to indicate the status, as shown below.



*Figure 9: LED indicator*

*Table 8: LED status description*

Name	Status	Description
PWR	on	Power supply is ok.
	off	Power supply has failed.

Name	Status	Description
SA1	flash	It is receiving com port data via Ethernet.
SA2	flash slowly	Server: The Ethernet is initial ok and wait for the client to login. Client: The Ethernet is initialized ok and login completely. It has readied to enable voice and com port data connection by the server.
	flash fast	It is sending or receiving voice data via Ethernet.
SA1 & SA2	on	There are happening some errors. (Client: Please check settings about IP & DNS)
	flash slowly (SA1 & SA2 flash at the same time)	It is trying to establish the connection with the server/client. If it can't connect to the server/client for a long time, please check that the M-4132 has available network settings and is working well on Ethernet.
	flash (SA1 & SA2 alternate flash)	Server: Receive the request to connect from the client. Client: Request server to connect.

## 2.5 Communication Port

M-4132 uses several communication ports of Ethernet, as shown in the below. If the user connects M-4132 client by “ETM operation mode”, the communication ports will include the ports of “ETM configuration file”.

*Table 9: Communication Port*


Service	Port number	note
Web Server	80	
FTP Server	21	
Telnet Server	23	
SSH Server	22	
E-mail function	587	default
VSoIP function	443	default
VxComm function	10000, 10001	
VPN function	1194	

### 3. Configuration and Operation with Web Browser

The M-4132 module is built-in web server, the user can configure and operate the M-4132 by web browser (ex: IE).

#### 3.1 Connection Setting

Before you open the web browser to configure the module, it needs to connect the M-4132 and your PC to the same sub network or same Ethernet Switch (as shown in figure 10) and set network settings (such as IP/Mask/Gateway) of the PC. The example of connection setting will describe below and Microsoft Windows XP Professional SP2 is used.

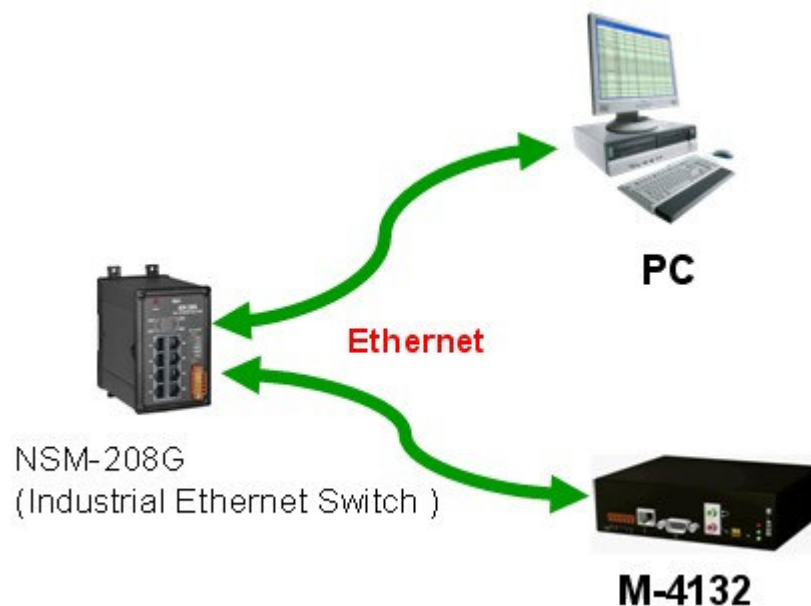


*Figure 10: connection architecture*

#### **Connection steps :**

##### Step 1: Open Network Connections

- 1.Click “start->Settings->Network Connections”



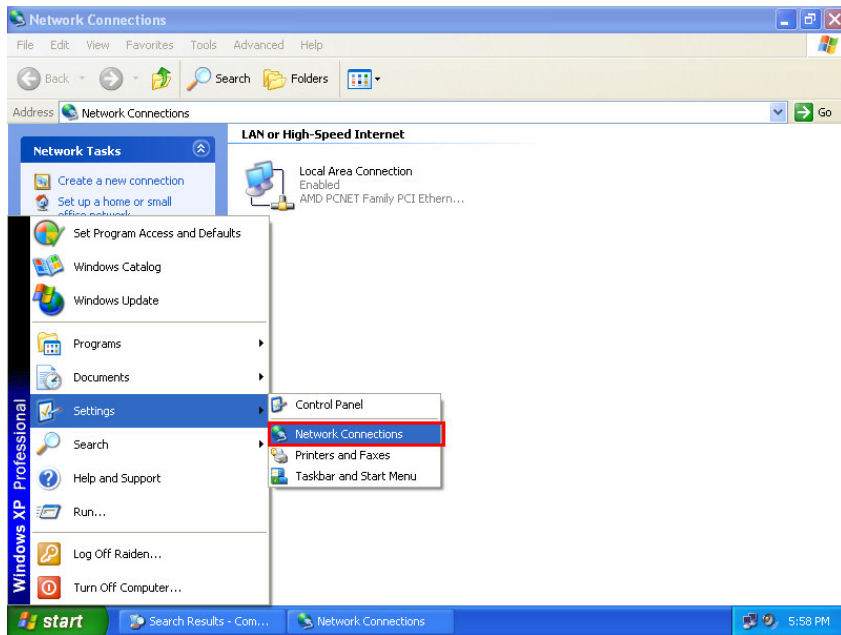


*Figure 11: click “start->Settings->Network Connections”*

2. Double click “Local Area Connection” icon



3. click “Properties” button

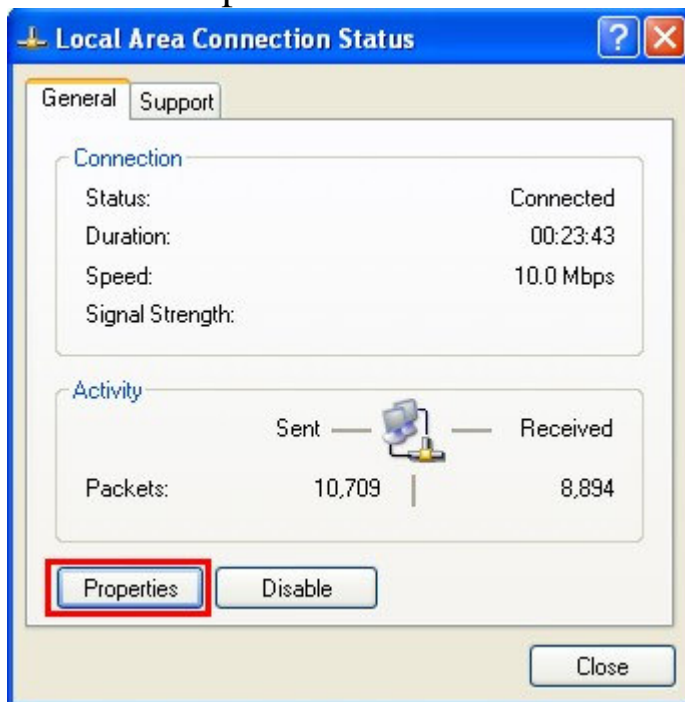

*Figure 12: click “Properties” button*

#### 4. Select “Internet Protocol(TCP/IP)” and click “Properties” button

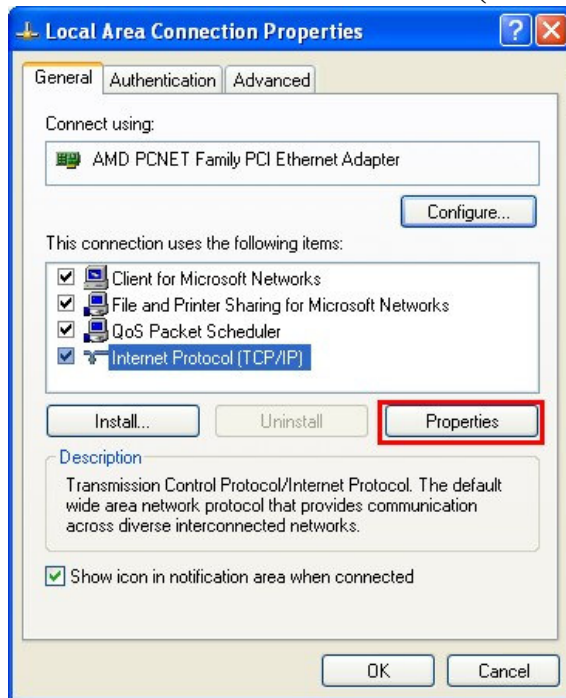


Figure 13: click “Properties” button

Step 2: Set “Internet Protocol Properties” and then click “OK” button. The settings must have the same domain and different IP with the M-4132. (ex: M-4132’s default IP = 192.168.1.217, PC’s IP = 192.168.1.210).

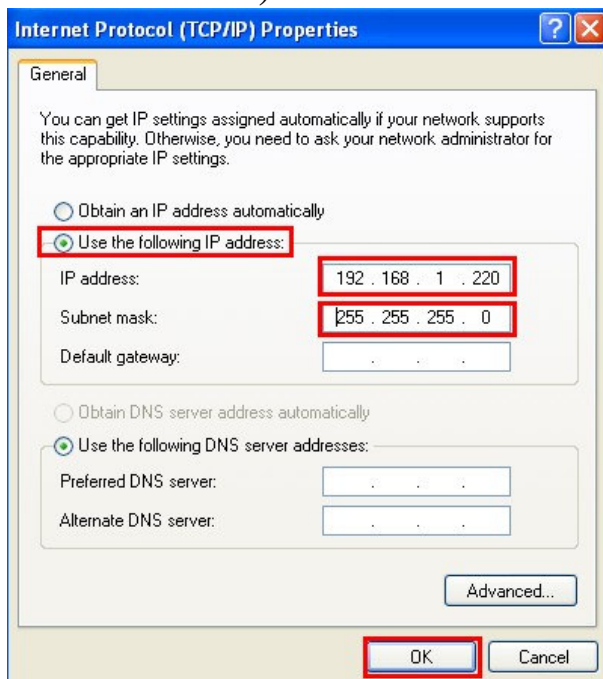


Figure 14: set “Internet Protocol Properties”


### Step 3: test connection

#### 1. Click “start->Run...”




*Figure 15: click “start->Run...”*

#### 2. Key in “cmd” and then click ”OK” button

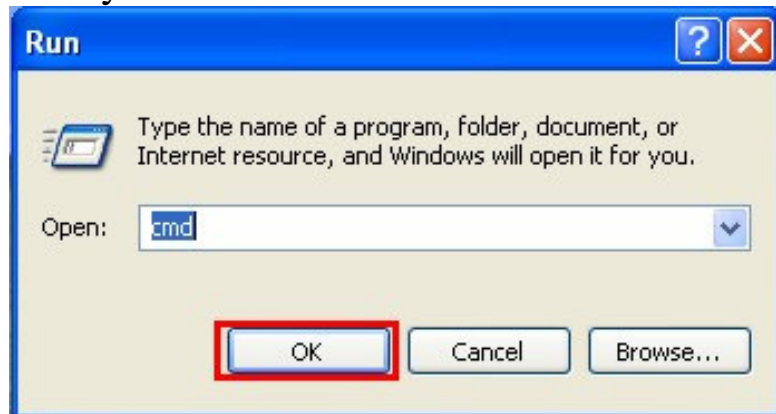

*Figure 16: key in “cmd” and then click ”OK” button*

3. key in “ping 192.168.1.217” and click “Enter”. If the response message shows “Request timed out”(figure 17), it means the network settings between PC and the module are not correct. Please check the network is available and the settings are all correct.

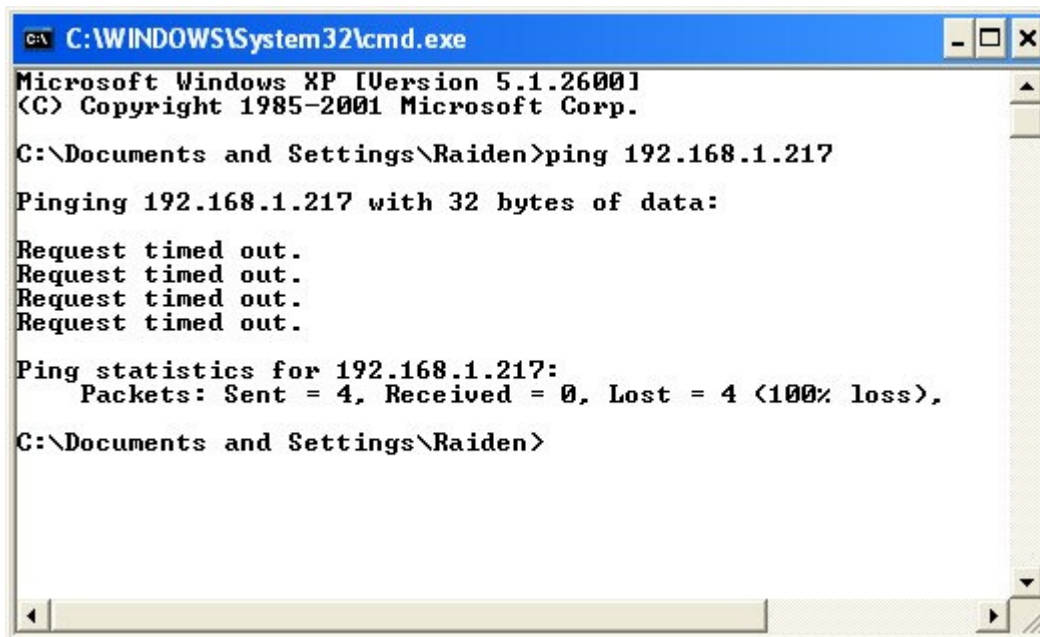

```
C:\WINDOWS\System32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\Raiden>ping 192.168.1.217

Pinging 192.168.1.217 with 32 bytes of data:


Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.217:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\Raiden>
```

*Figure 17: Ping IP Error*

If the network settings are correct, it will show “Packets: Sent=4, Received=4, Lost=0“(figure 18).

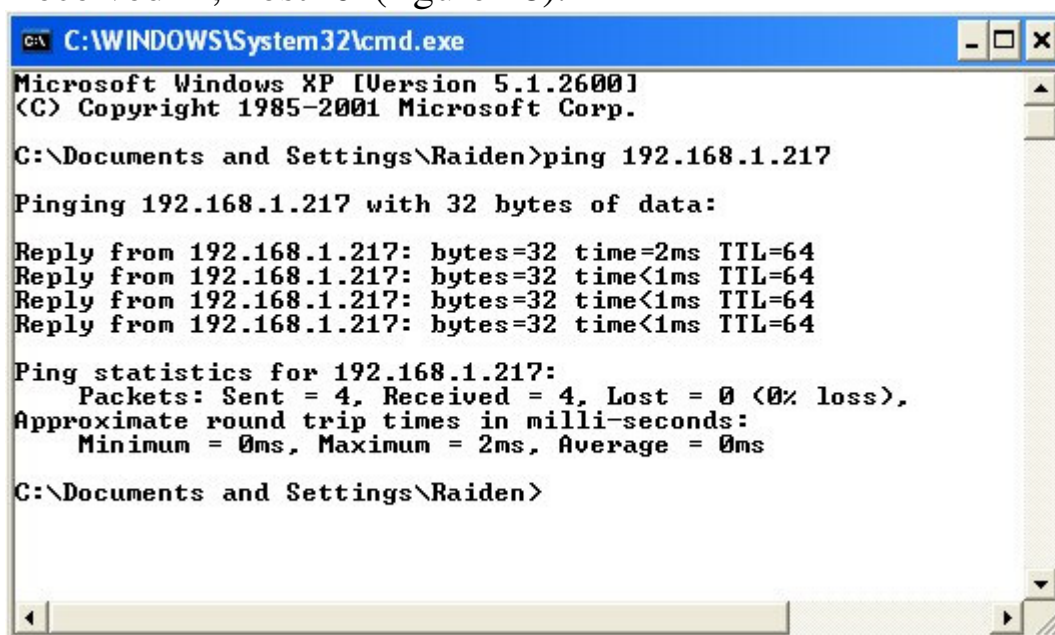

```
C:\WINDOWS\System32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\Raiden>ping 192.168.1.217

Pinging 192.168.1.217 with 32 bytes of data:

Reply from 192.168.1.217: bytes=32 time=2ms TTL=64
Reply from 192.168.1.217: bytes=32 time<1ms TTL=64
Reply from 192.168.1.217: bytes=32 time<1ms TTL=64
Reply from 192.168.1.217: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.1.217:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\Documents and Settings\Raiden>
```

*Figure 18: Ping IP OK*

### 3.2 Web Configuration—function menu

Now the PC is set completely and working well with the M-4132. Please

open web browser (ex: IE, Mozilla, etc.) on PC and key in <http://192.168.1.217/main.htm> in the Address line and then press “Enter” key to link the M-4132, as shown in figure 19.

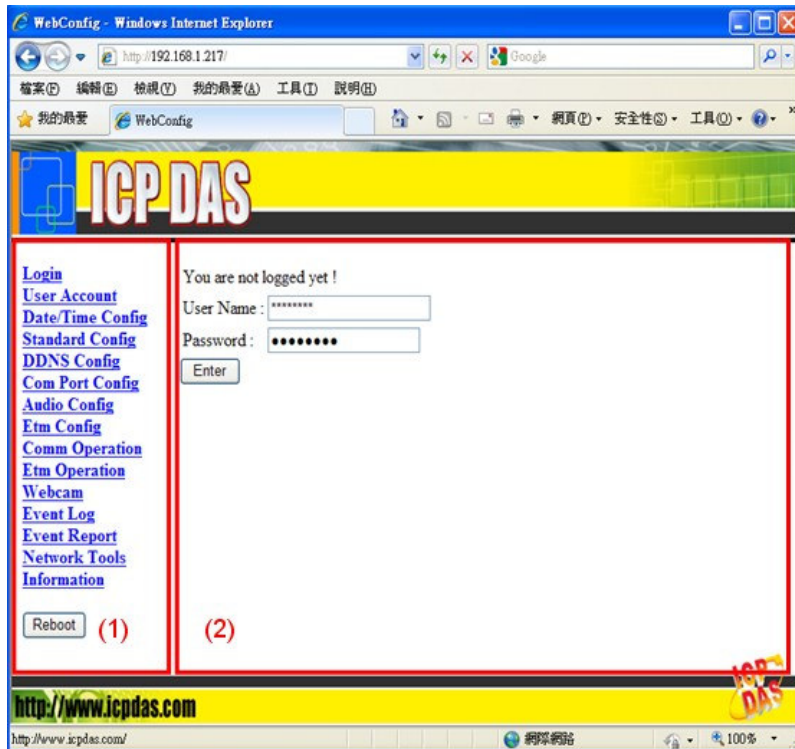


Figure 19: Web Configuration page

When the browser connects with the M-4132, Figure 19 is the first page. The left side is the function menu and the other is the setup page in the first page. Server and Client are different in the function menu, as shown in the below.

Function menu (Server)--

- Login
- User Account
- Date/Time Config
- Standard Config
- DDNS Config
- Com Port Config
- Audio Config
- Etm Config
- Comm Operation

- Etm Operation
- Webcam
- Event Log
- Event Report
- Network Tools
- Information
- Reboot


Function menu (Client)--

- Login
- User Account
- Date/Time Config
- Standard Config
- Com Port Config
- Audio Config
- Comm Operation
- Etm Operation
- Network Tools
- Information
- Reboot

The “Reboot” button can provide the user to restart the M-4132.

### 3.3 Web Configuration—setup page

#### 1、Login : The user login and logout interface

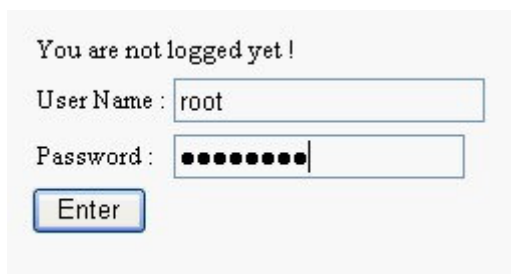

The screenshot shows a web interface for user login. At the top, it says "You are not logged yet!". Below this, there are two input fields: "User Name" containing the text "root" and "Password" containing a series of black dots. A blue "Enter" button is positioned below the password field.

*Figure 20: user login page*

You had logined already.

User Name : \*\*\*\*\*

Password : ●●●●●●●●

Exit

*Figure 21: user logout page*

**2 、 User Account** : The user account setting limits which user can configure the module settings. The super user (Account 1, name="root", password="icpdas") is an only the user that can edit this page.

**Account 1 (Super User)**

User Name : root

Password : icpdas

**Account 2**

User Name : user1

Password : puser1

**Account 3**

User Name : user2

Password : puser2

**Account 4**

User Name : user3

Password : puser3

**Account 5**

User Name : user4

Password : puser4

Save Setting    Default Setting

*Figure 22: User Account page*

**3 、 Date/Time Config** : The Date and Time of M-4132 can be set via “Date/Time Config” page. The format of date is “Year(4 digits)/Month(2 digits)/Day(2 digits)” and the time is “Hour(2 digits):Minute(2 digits):Second(2 digits)”. The user can get current date and time of M-4132 by click “Refresh” button and set date and time from the PC by click “Setting” button.

The screenshot shows a web interface titled "System Time". It contains two input fields: "Date (Year/Mon/Day) : 2008/10/27" and "Time (Hour:Min:Sec) : 17:12:59". Below these fields are two buttons: "Refresh" and "Setting".

*Figure 23: System Time page*

**4 · Standard Config** : When changes the setting in this page, the user must restart the M-4132 to enable new settings.

1. System

a. Operation Mode : VSoIP Server / VSoIP Client ◦

The M-4132 has 2 operation modes. They are “VSoIP Server” and “VSoIP Client”. The user can set the M-4132 to be a server or client in this page. When the M-4132 plays the role of client, it will try to connect with the server. When the M-4132 plays the role of server, it will wait client to link.

2. Encryption

a. Mode : None / DES / AES

The user can set encryption mode by this setting.

None => Disable encryption functions.

DES => Enable encryption functions by DES algorithm.

AES => Enable encryption functions by AES algorithm.

b. Key : The user can set private key by this setting.

Maximum length of key is 8 characters.

3. NetWork

a. Host Name : The module name. It can be recognized when operation.

b. Connect to Server by : IP / DNS

The setting can provide the client to connect with the server by IP or DNS of the server



- c. **ServerIP** : The user can set the IP address of the server that the client wants to connect to.
- d. **ServerDNS** : The user can set the DNS of the server that the client wants to connect to.
- e. **Communication Port** : The user can set the port number of the server that the client want to link in this setting. The factory setting is “443”.
- f. **VPN** : Disable / Enable  
The user can enable or disable VPN function by this setting.
- g. **Boot Protocol** : Static IP / DHCP / ADSL Connection  
M-4132 supports three kinds of IP modes, they are “Static IP”, “DHCP” and “PPPoE (ADSL)”. The user can choose one of these modes to set the IP address of M-4132 when booting.

#### 4. Static IP Config

- a. **IP Address** : When Boot Protocol is “Static IP”, the user can set IP address of M-4132 in this field.
- b. **NetMask** : When Boot Protocol is “Static IP”, the user can set subnet mask of M-4132 in this field.
- c. **GateWay** : When Boot Protocol is “Static IP”, the user can set gateway of M-4132 in this field.
- d. **DNS Server** : When Boot Protocol is “Static IP”, the user can set DNS server of M-4132 in this field

#### 5. ADSL Config : When Boot Protocol is “ADSL”, the user

needs to set “user name” and “password” for ADSL connection. The user can get the “user name” and “password” from your ISP (Internet Service Provider).

The screenshot displays a configuration interface with several sections:

- System**: Operation Mode is set to "VSoIP Server".
- Encryption**: Mode is set to "None", and Key is set to "\_userkey".
- NetWork**: Host Name is "Server", Connect to Server by (\*) is "IP", Server IP (\*) is "192.168.1.217", Server DNS (\*) is "www.serverdns.com", Communication Port is "443", VPN is "Disable", and Boot Protocol is "Static IP".
- Static IP Config**: IP Address is "192.168.1.217", Net Mask is "255.255.255.0", GateWay is "192.168.1.254", and DNS Server is "168.95.1.1".
- ADSL Config**: User Name is "user" and Password is "password".


At the bottom, there are "Save Setting" and "Default Setting" buttons, and a note: "PS: (\*) means the parameters are used only for VSoIP\_Client".

Figure 24: Standard Config page

**5 、 DDNS Config** : When the M-4132 plays the role of server and Boot Protocol isn't "Static IP", the client may not connect with the server, because the IP address of the server is floating, not static. We provide a solution for this situation. That is DDNS service. When IP address of the server is changed, the server will register current IP to website that provides DDNS service. The client can connect with the server by domain name that the user registers.

**NOTE:** Every company that provides DDNS service has different way to register. In order to make it correctly work, we recommend the user to use DDNS service that the DynDNS (<http://dyn.com/dns/>) / FreeDNS (<http://freedns.afraid.org/>) / zoneedit (<http://www.zoneedit.com/>) / no-ip (<http://www.noip.com/>) provide. Next, we will make an example to show how to use DDNS service by DynDNS.

1. Create your Dynamic DNS account
  - a. Please open web browser (ex: IE, Mozilla, etc.) on PC and key in <http://www.dyndns.com/> in the Address line and then press “Enter” key.
  - b. Key in “user name” and “password” and click “Login” button. If the user has not created user account, please click “Create Account” Hyperlink to create user account and then login user account.

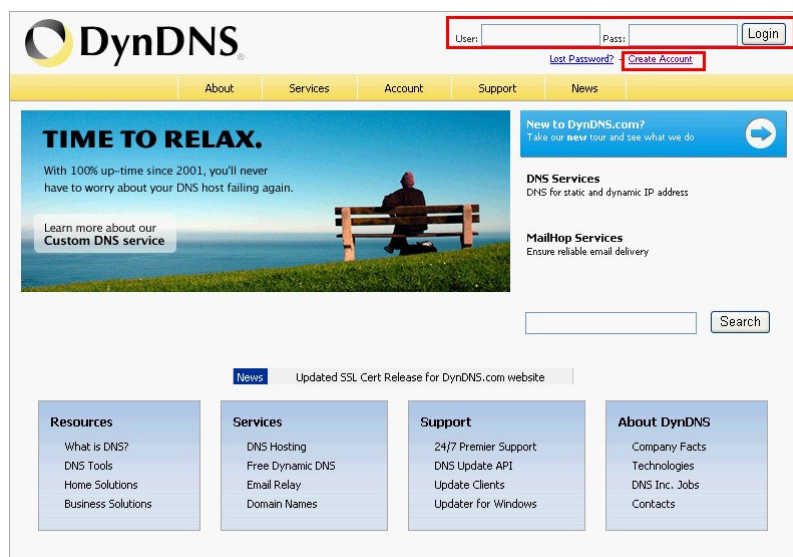

*Figure 25: DynDNS home page*

c. Click “Services” Hyperlink to enter Services page

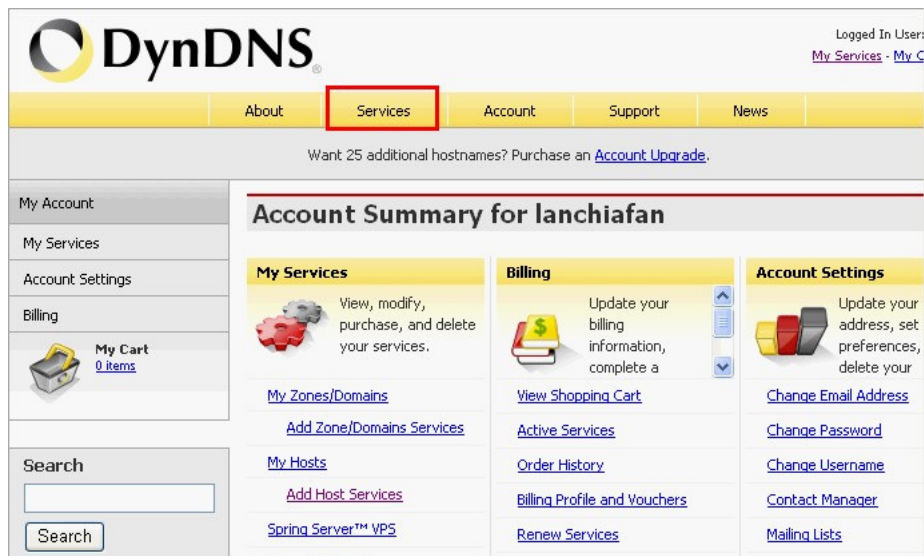


Figure 26: click ”Services” Hyperlink

d. Click “Dynamic DNS” Hyperlink to enter Dynamic DNS page

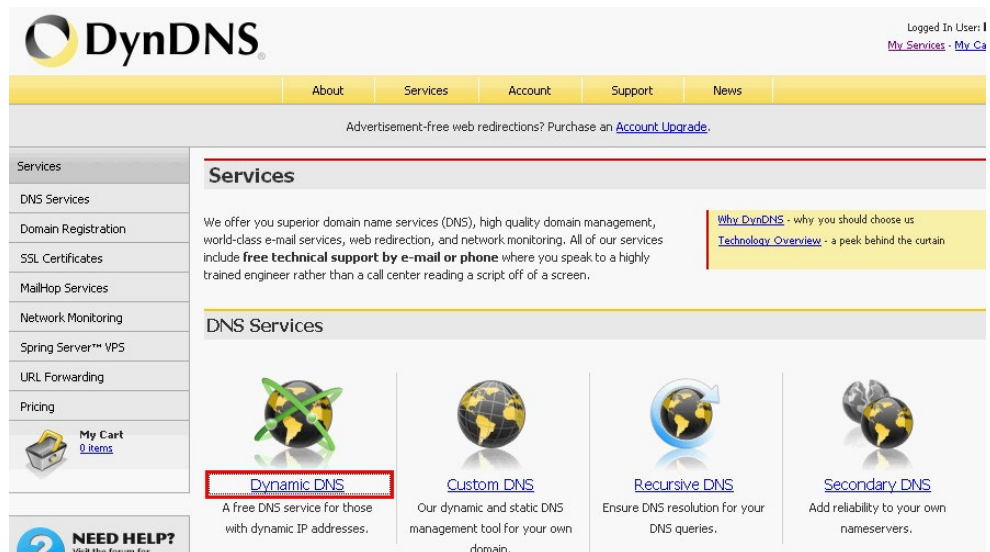


Figure 27: click ” Dynamic DNS” Hyperlink

e. Click “Get Started” button

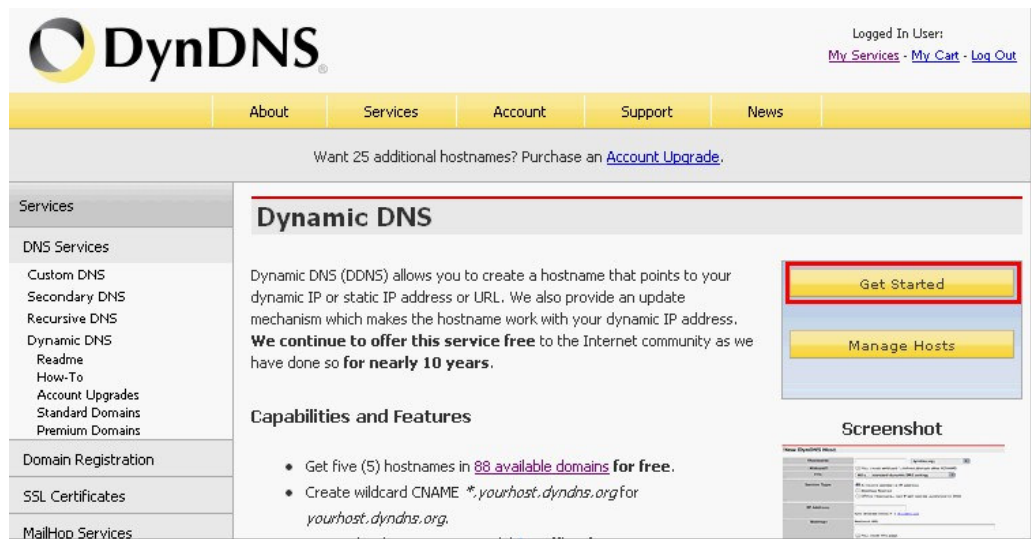


Figure 28: click "Get Started" button

f. Key in and select your hostname (ex: icpdas.home linux.com ), and key in IP address of the server. Don't care the other settings and click “Create Host” button.

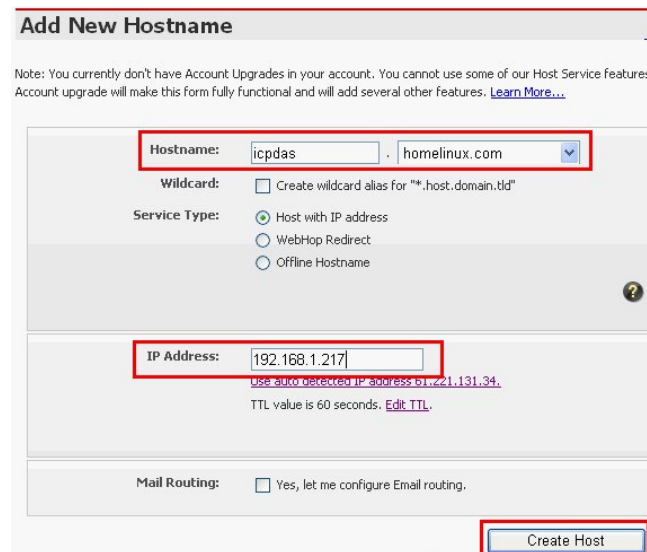


Figure 29: Add New Hostname

Host Services			
Hostname	Service	Details	Last Updated
Hostname <a href="#">icpdas.homelinux.com</a> created.			
<a href="#">icpdas.homelinux.com</a>	Host	192.168.1.217	Oct. 27, 2008 11:43 PM

[» Bulk Update IP Address And Service Type](#)  
[» Host Update Logs](#)

*Figure 30: Create New hostname success*

## 2. DDNS Config :

### a. DDNS Service : Disable / Enable

The user can Enable or Disable DDNS function by this setting.

### b. DDNS System : It is the DDNS service type. It can be FreeDNS/Zoneedit/NOIP/DynDNS.

### c. Host Name : It is the hostname that user creates in DDNS service provider.

### d. User Name : It is the name of the user account in DDNS service provider.

### e. Password : It is the password of the user account in DDNS service provider.

## DDNS Config

DDNS Service	<input type="text" value="Disable"/>
DDNS System	<input type="text" value="DynDNS"/>
Host Name	<input type="text" value="DDNShost.com"/>
User Name	<input type="text" value="user"/>
Password	<input type="text" value="password"/>
<input type="button" value="Save Setting"/>	<input type="button" value="Default Setting"/>

*Figure 31: DDNS Config page*

**6、Com Port Config** : The user can set com port setting of M-4132 in this page. If com port setting of the server and client is different, Com port setting of the client will be covered by the server. When the user changes the setting in this page, the user must restart the M-4132 to active the new setting.

1. Local Port : RS232 / RS485 / VxComm  
Select local com port connection from RS-232 or RS-485 or VxComm.
2. Remote Port : RS232 / RS485 / VxComm  
Select remote com port connection from RS-232 or RS-485 or VxComm. This setting is used for VSoIP\_Server.
3. Baud Rate : 1200 / 2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200 / 230400 bps
4. Data Bits : 5 / 6 / 7 / 8 data bits
5. Parity : None / Odd / Even / Space
6. Stop Bits : 1 / 2 stop bits
7. Flow Control : None / Hardware / XonXoff

### Com Port Config


Local Port	RS232	▼
Remote Port (*)	RS232	▼
Baud Rate	115200	▼
Data Bits	8	▼
Parity	None	▼
Stop Bits	1	▼
Flow Control	None	▼

**PS:** (\*) means the parameters are used for VSoIP\_Server

*Figure 32: Com Port Config page*

**7、Audio Config** : The user can set the Audio quality, output volume and input volume in this page. When the audio quality is bad, the user can turn audio quality, output volume and input volume between the server and client to improve.

1. Quality : 2~10  
Select the audio quality, including sample rate and sample resolution. The best quality is 10.
2. Output Volume : 0~10  
The maximum output volume is 10.
3. Input Volume : 0~10  
The maximum input volume is 10.

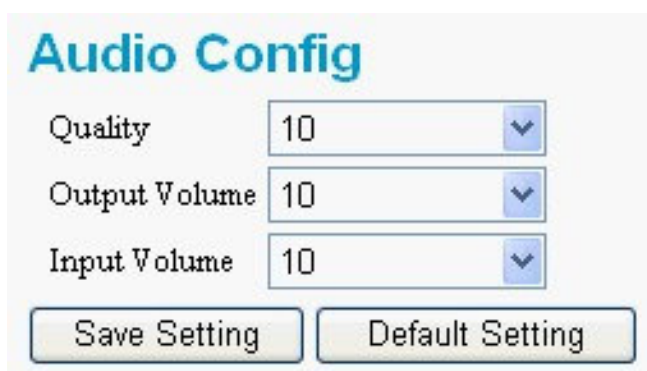

The screenshot shows a web interface titled "Audio Config". It contains three dropdown menus: "Quality" set to 10, "Output Volume" set to 10, and "Input Volume" set to 10. Below the dropdowns are two buttons: "Save Setting" and "Default Setting".

*Figure 33: Audio Config page*

**8 · ETM Config** : The user can set ETM settings of M-4132 in this page for Ethernet through mode.

1. Target IP :  
Set IP address of the target device (ex: PLC). M-4132 client will connect to target device by this IP.
2. Configure file : Configure1~8  
Select configuration file. When the M-4132 server, client and target device operate at ETM operation mode, they will connect by the configuration file.
3. Start value of port scan : 1~65535
4. Stop value of port scan : 1~65535
5. Save Setting : Save current settings.
6. Default Setting : Load default settings.
7. Port Setting : The user can link “Port Setting” page by this button. The description is shown below about “Port Setting” page.



- a. Configure file : Select configuration file.
  - b. Show : Show the content of the configuration file
  - c. Set : Set the content of the configuration file
  - d. Return : Return to the “Etm Config” page.
  - e. Configuration : The content of the configuration file is shown here. “Target Port” means the communication port of the target device. “Communication Port” means the communication port of M-4132.
8. Port Scan : The user can link “Port Scan” page by this button. The description is shown below about “Port Scan” page.
- a. Target IP : Show IP address of the target device (ex: PLC).
  - b. Port Range : Show the range of port scan.
  - c. Save result to : Select configuration file that the user wants to save.
  - d. Scan result : Show the result of port scan.
  - e. Login list : This item can show the name of client that login completely.
  - f. Start Scan : Start “Port Scan” function. Before the user clicks “Start Scan” button, the user needs to select client device at “Login list”. After the user clicked “Start Scan” button, the “Start Scan” button will become to “Stop Scan” button and M-4132 will enable “Port Scan” function. After the procedure of “Port Scan” finished, the “Stop Scan” button will become to “Start Scan” button again.
  - g. Return : Return to the “Etm Config” page.

## Etm Config

Target IP	<input type="text" value="192.168.3.39"/>
Configure file	<input type="text" value="Configure1"/> ▼
Start value of port scan	<input type="text" value="1"/>
Stop value of port scan	<input type="text" value="10000"/>

*Figure 34: Etm Config page*

## Port Setting

Configure file

### Configuration :

Target Port0:	<input type="text" value="5007"/>	Communication Port0:	<input type="text" value="20000"/>	TCP	Enable
Target Port1:	<input type="text" value="5006"/>	Communication Port1:	<input type="text" value="20001"/>	UDP	Enable
Target Port2:	<input type="text" value="5008"/>	Communication Port2:	<input type="text" value="20002"/>	UDP	Enable
Target Port3:	<input type="text" value="5009"/>	Communication Port3:	<input type="text" value="20003"/>	UDP	Enable
Target Port4:	<input type="text" value="0"/>	Communication Port4:	<input type="text" value="0"/>	TCP	Disable
Target Port5:	<input type="text" value="0"/>	Communication Port5:	<input type="text" value="0"/>	TCP	Disable
Target Port6:	<input type="text" value="0"/>	Communication Port6:	<input type="text" value="0"/>	TCP	Disable
Target Port7:	<input type="text" value="0"/>	Communication Port7:	<input type="text" value="0"/>	TCP	Disable

*Figure 35: Port Setting page*

## Port Scan

Target IP : 192.168.3.39

Port Range : 1~10000

Save result to :

### Scan result :

Target Port0:	<input type="text" value="5007"/>	Communication Port0:	<input type="text" value="20000"/>	TCP	Enable
Target Port1:	<input type="text" value="5006"/>	Communication Port1:	<input type="text" value="20001"/>	UDP	Enable
Target Port2:	<input type="text" value="5008"/>	Communication Port2:	<input type="text" value="20002"/>	UDP	Enable
Target Port3:	<input type="text" value="5009"/>	Communication Port3:	<input type="text" value="20003"/>	UDP	Enable
Target Port4:	<input type="text" value="0"/>	Communication Port4:	<input type="text" value="0"/>	TCP	Disable
Target Port5:	<input type="text" value="0"/>	Communication Port5:	<input type="text" value="0"/>	TCP	Disable
Target Port6:	<input type="text" value="0"/>	Communication Port6:	<input type="text" value="0"/>	TCP	Disable
Target Port7:	<input type="text" value="0"/>	Communication Port7:	<input type="text" value="0"/>	TCP	Disable

### Note :

None

Login list:

*Figure 36: Port Scan page*

**9 、 Comm Operation** : The user can use or test voice and com port transmission functions in this page.

1. Communication configure : The user can select communication parameters in this page. The parameters are effective in current connection, but it will not change the system settings.

a. Quality : 2~10

Select the audio quality.

b. Local Port : RS232/RS485/VxComm

Select local com port connection from RS-232 or RS-485 or VxComm.

c. Remote Port : RS232/RS485/VxComm

Select remote com port connection from RS-232 or RS-485 or VxComm. This setting is used for VSoIP\_Server.

d. Baud Rate : 1200 / 2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200 / 230400 bps

Select baud rate of com port.

e. Data Bits : 5 / 6 / 7 / 8 data bits

Select data bits of com port.

f. Parity : None / Odd / Even / Space

Select parity of com port.

g. Stop Bits : 1 / 2 stop bits

Select stop bits of com port.

h. Flow Control : None / Hardware / XonXoff

Select flow control of com port.

i. GetStatus : The user can get current communication parameters from this button.

j. SetStatus : The user can set current communication parameters from this button.

2. Operation : The settings will only show in page of the server. If you want to refresh the status in this page, you can click

“GetStatus” button.

a. Your Status : Show status of M-4132

- Idle Mode :

The voice and com port connection have not established yet.

- Broadcast Connection Mode :

All clients will hear the voice from microphone of the server via Ethernet.

- Broadcast & Pair Mode :

Server and client that the user selected will setup a virtual channel over Ethernet that allow bi-directional voice and serial (RS232 or RS485) data to pass through and the other client will also hear the voice from microphone of the server.

- Pair Connection Mode :

Server and client that the user selected will setup a virtual channel over Ethernet that allow bi-directional voice and serial (RS232 or RS485) data to pass through.

- ETM Connection Mode :

Server and client that the user selected will setup a virtual channel over Ethernet that allow bi-directional voice and Ethernet data to pass through.

- ETM Scan Mode :

Server and client will scan target device (ex: PLC) that the user selected to get the port settings.

- Bandwidth Test Mode :

System will measure the bandwidth between server and client.

- b. Request connection list : This item can show the name of client that send out the communication request.
- c. Login list : This item can show the name of client that login completely.
- d. “Pair Connection” button : The user can send “Pair Connection” command to M-4132 by this button. The user must select the name of the client from “Login list” before click this button.
- e. “Broadcast Connection” button : The user can send “Broadcast Connection” command to M-4132 by this button.
- f. “Broadcast & Pair” button : The user can send “Broadcast & Pair Connection” command to M-4132 by this button. The user must select name of the client from “Login list” before click this button.
- g. “Drop Client” button : The user can cancel “Pair Connection” command and return to “Broadcast Connection” mode by this button.
- h. “Request Break” button : The user can cancel all audio and com port connections by this button.

PS : Server can accept a maximum of 64 clients to login. When Server is at “Broadcast Connection” mode or “Broadcast & Pair” mode, we recommend that server must not login to exceed 32 clients, because it will make a intermittent audio transmission.

### Communication configure

Quality	10	▼
Local Port	RS232	▼
Remote Port (*)	RS232	▼
Baud Rate	115200	▼
Data Bits	8	▼
Parity	None	▼
Stop Bits	1	▼
Flow Control	None	▼

### Operation

Your Status:Idle!!

Request connection list :

----- ▼

Login list:

----- ▼

*Figure 37: Comm Operation page*

**10 、 Etm Operation** : The user can use or test voice and Ethernet through functions in this page.

1. Communication configure : The user can select communication parameters in this page. The parameters are effective in this current connection, but it will not change the system settings.
  - a. Quality : 2~10  
Select the audio quality.
  - b. Target IP :  
Set IP address of the target device (ex: PLC). M-4132 client will connect to target device by this IP.
  - c. Configure file : Configure1~8  
Select configuration file. When the M-4132 server, client and target device operate at ETM operation mode, they will connect by the configuration file.

- d. GetStatus : The user can get current communication parameters from this button.
  - e. SetStatus : The user can set current communication parameters from this button.
2. Operation : The settings will only show in page of the server. If you want to refresh the status in this page, you can click “GetStatus” button.
- a. Your Status : Show status of M-4132. Please refer to section 3.3 “Web Configuration” → “Comm Operation” page for detail.
  - b. Request connection list : This item can show the name of client that send out the communication request.
  - c. Login list : This item can show the name of client that login completely.
  - d. “Pair Connection” button : The user can send “Pair Connection” command to M-4132 by this button. The user must select the name of the client from “Login list” before click this button.
  - e. “Request Break” button : The user can cancel all audio and data connections by this button.

**Communication configure**

Quality

Target IP

Configure file

**Operation**

Your Status:Idle!!

Request connection list :

**Login list:**

*Figure 38: Etm Operation page*

**11 、Webcam** : The settings will only show in the web page of the server. When the server connected with client by Pair Connection mode and the client has video interface, the user can click “Remote Image” to watch the live image of the client.

note1: M-4132 has not video interface.

note2: The user must enable JavaScript firstly in your web browser to show image on PC.

## Image

### Remote Image

**PS: The remote image function will enable at Pair\_Connection Mode**

*Figure 39: Webcam page*



## Remote Image



*Figure 40: Remote Image page*

**12、Event Log** : It will show the event log that clients login and connection break. To clear the event log can click “Clear Log” button.

## Event Log

Date:2008/12/12	Time:13:42:18	Hostname=Client1	IP:192.168.0.211	Event:Login in
Date:2008/12/12	Time:14:03:01	Hostname=Client1	IP:192.168.0.211	Event:Login in
Date:2008/12/12	Time:14:14:32	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:14:18:05	Hostname=Client1	IP:192.168.0.211	Event:Login in
Date:2008/12/12	Time:14:19:25	Hostname=Server	IP:192.168.0.210	Event:Stop All Service by Web
Date:2008/12/12	Time:14:19:28	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:14:19:32	Hostname=Server	IP:192.168.0.210	Event:Stop All Service by Web
Date:2008/12/12	Time:16:11:52	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:16:12:40	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:16:13:10	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:16:13:12	Hostname=Server	IP:192.168.0.210	Event:Stop All Service by Web
Date:2008/12/12	Time:16:15:58	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:16:21:42	Hostname=Client1	IP:192.168.0.211	Event:Login in
Date:2008/12/12	Time:16:21:56	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:16:42:47	Hostname=Client1	IP:192.168.0.211	Event:Login in
Date:2008/12/12	Time:16:42:54	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:16:43:06	Hostname=Client1	IP:192.168.0.211	Event:Ask break
Date:2008/12/12	Time:17:05:15	Hostname=Client1	IP:192.168.0.211	Event:Login in
Date:2008/12/12	Time:17:07:27	Hostname=Server	IP:192.168.0.210	Event:Pair Connection by Web
Date:2008/12/12	Time:17:07:38	Hostname=Client1	IP:192.168.0.211	Event:Ask break

Clear Log

*Figure 41: Event Log page*

**13 、 Event Report** : The page provides the server sending “Event Log” to user by e-mail. It uses SMTP protocol to provide mail service.

1. Function : Disable / Enable

The user can Enable or Disable “Event Report” function by this setting. It must finish setting mail server before enable this function, else event log will not be sent to the user’s mailbox correctly.

2. Report Cycle : every month / every week / every day

Select report period from every month, every week or every day.

3. Report Date for monthly : 1~31

Set report date, when report cycle is every month.

4. Report Date for weekly : Monday ~ Sunday

Set report date, when report cycle is every week.

5. Report Time : 00:00 ~ 23:59

Set report time. The format is “Hour (2 digits):minute (2 digits)”.

6. “Save Setting” button : For saving the settings.

7. “Default Setting” button : For getting the default settings.

8. “Mail Server Setting” button : The user can link “Mail Server Setting” page by this button. The description is shown below about “Mail Server Setting” page.

a. Mail Server : Set URL of mail server. Mail server is “smtp.gmail.com”, if you use Gmail.

b. Mail Port : Set port number of mail server. Mail port is “587”, if you use Gmail.

c. Mail To : Set mail address that receive event report (ex: \*\*\*\*@gmail.com).

d. Mail From : Set mail address that the user create at Gmail (ex: \*\*\*\*@gmail.com).

e. Authentication Method : None / AUTH LOGIN / AUTH PLAIN

Select Authentication method. Authentication method is “AUTH LOGIN”, if you use Gmail.

f. User Name : Set the user name for sign in to mail server with your account.

g. Password : Set the password for sign in to mail server with your account.

h. TLS/SSL Certification : Enable / Disable

Select enable or disable TLS/SSL certification. It is Enable, if you use Gmail.

i. “Save Setting” button : For saving the settings.

j. “Default Setting” button : For getting the default settings.

k. “SendMail test” button : For testing the mail server settings. If they are all correct, it will show “Send Mail success” message after the user click the button.

l. “Return” button : Return to the “Event Report” page.

### Event Report

Function :

Report Cycle :

Report Date for monthly :

Report Date for weekly :

Report Time (hh:mm) :

*Figure 42: Event Report page*

### Mail Server Setting

Mail Server :

Mail Port :

Mail To :

Mail From :

Authentication Method :

User Name :

Password :

TLS/SSL Certification :

*Figure 43: Mail Server Setting page*

## 14 、 Network Tools :

1. Ping Command : This command can help user to test the network ability.
2. ARP Command : This command can display the system ARP cache
3. Trace Route Command : This command can help user to trace the route IP packets follow going to 'device'.
4. Bandwidth Test Command : This command can help user to measure the bandwidth between server and client.

## Network Tools

[Ping Command](#)

[ARP Command](#)

[TraceRoute Command](#)

[Bandwidth test Command](#)

*Figure 44: Network Tools page*

### Ping Command

Ping (IP or Domain name):

```
PING google.com (64.233.189.104): 56 data bytes
64 bytes from 64.233.189.104: icmp_seq=0 ttl=52 time=64.2 ms
64 bytes from 64.233.189.104: icmp_seq=1 ttl=52 time=62.0 ms
64 bytes from 64.233.189.104: icmp_seq=2 ttl=52 time=61.9 ms
64 bytes from 64.233.189.104: icmp_seq=3 ttl=52 time=60.1 ms

--- google.com ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 60.1/62.0/64.2 ms
```

**Note:** This command can help user to test the network ability.  
If the network is available, it will show '4 packets transmitted, 4 packets received, 0% packet loss'.

*Figure 45: Ping Command page*

### ARP Command

```
? (192.168.0.126) at 00:E0:18:FE:F5:4F [ether] on eth0
? (192.168.5.30) at <incomplete> on eth0
? (192.168.5.30) at <incomplete> on eth0
```

**Note:** This command can display the system ARP cache.

*Figure 46: ARP Command page*

## TraceRoute Command

Host (IP or Domain name) :

```
1 192.168.0.254 (192.168.0.254) 0.880 ms 1.039 ms 1.314 ms
2 61-221-131-33.HINET-IP.hinet.net (61.221.131.33) 3.429 ms 1.541
3 * * *
4 SKC1-3402.hinet.net (168.95.33.198) 81.743 ms 34.874 ms 35.357
5 SKC1-3011.hinet.net (220.128.24.150) 34.767 ms 35.329 ms 34.952
6 TCHN-3111.hinet.net (220.128.16.2) 39.391 ms 38.955 ms 39.202 m
7 202-39-179-185.HINET-IP.hinet.net (202.39.179.185) 40.099 ms 39.
8 202-39-179-171.HINET-IP.hinet.net (202.39.179.171) 41.285 ms 40.
```

**Note:** This command can help user to trace the route ip packets follow going to 'Host'.

*Figure 47: Trace Route Command page*

## Bandwidth Test Command

Login list:

```
Bandwidth testing in progress, please wait...

==== Date:2012/06/07 Time:14:18:19====
downlink speed is 3565 KBytes/s
uplink speed is 3732 KBytes/s
=====

The test is completed.
```

**Note:** This command can help user to test the network bandwidth.

**About pair connection with audio only :**

The recommended uplink/downlink speed is greater than 24 KBytes/s

**About pair connection with audio and video :**

The recommended uplink/downlink speed is greater than 54 KBytes/s

*Figure 48: Bandwidth Test Command page*

## 15 、 Information :

1. OS Version : Show OS version.
2. Firmware Version : Show application program version.

3. Current IP : Show current IP.
4. Subnet Mask : Show current subnet mask.
5. Mac Address : Show current Mac address.
6. License Verify : Show the result that the license is verified.  
If it shows “OK”, it means the licence is passed.

### Information

OS Version :	0.91
Firmware Version :	1.00
Current IP :	192.168.0.210
Subnet Mask :	255.255.0.0
Mac Address :	00:0d:e0:b1:00:08
Licence Verify :	OK

*Figure 49: Information page*

## 4. Application

### 4.1 Pair Connection

A server can accept one or more clients to login, but a server can only connect with a client in pair connection mode. In this mode, two M-4132s which are setting as Server and Client separately setup a virtual channel over Ethernet or Internet that allow bi-directional voice and serial (RS-232 or RS-485) data to pass through, as shown in figure 50, 51.


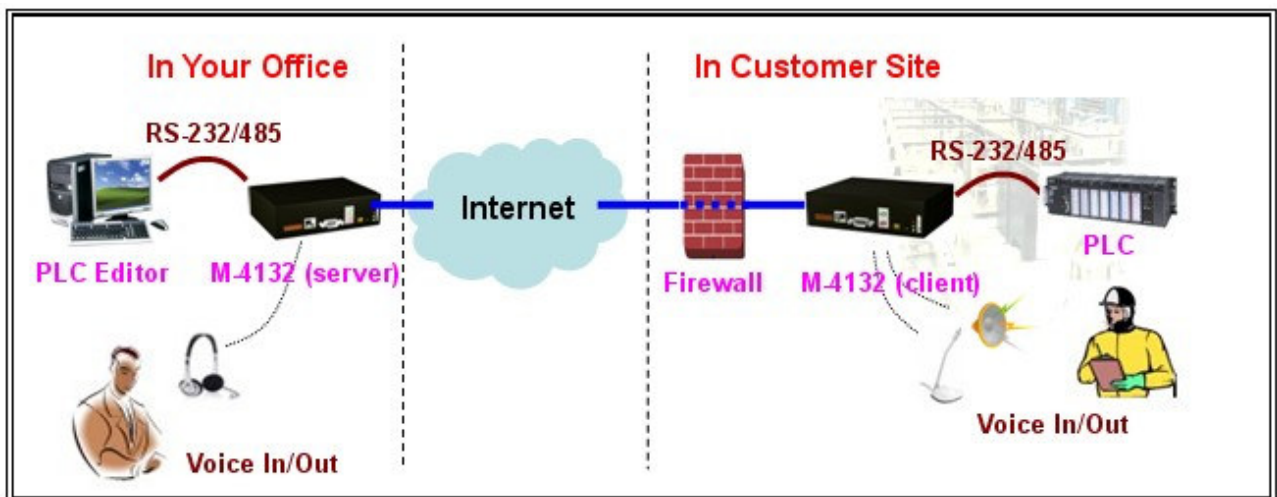


Figure 50: Pair connection (one server to one client)



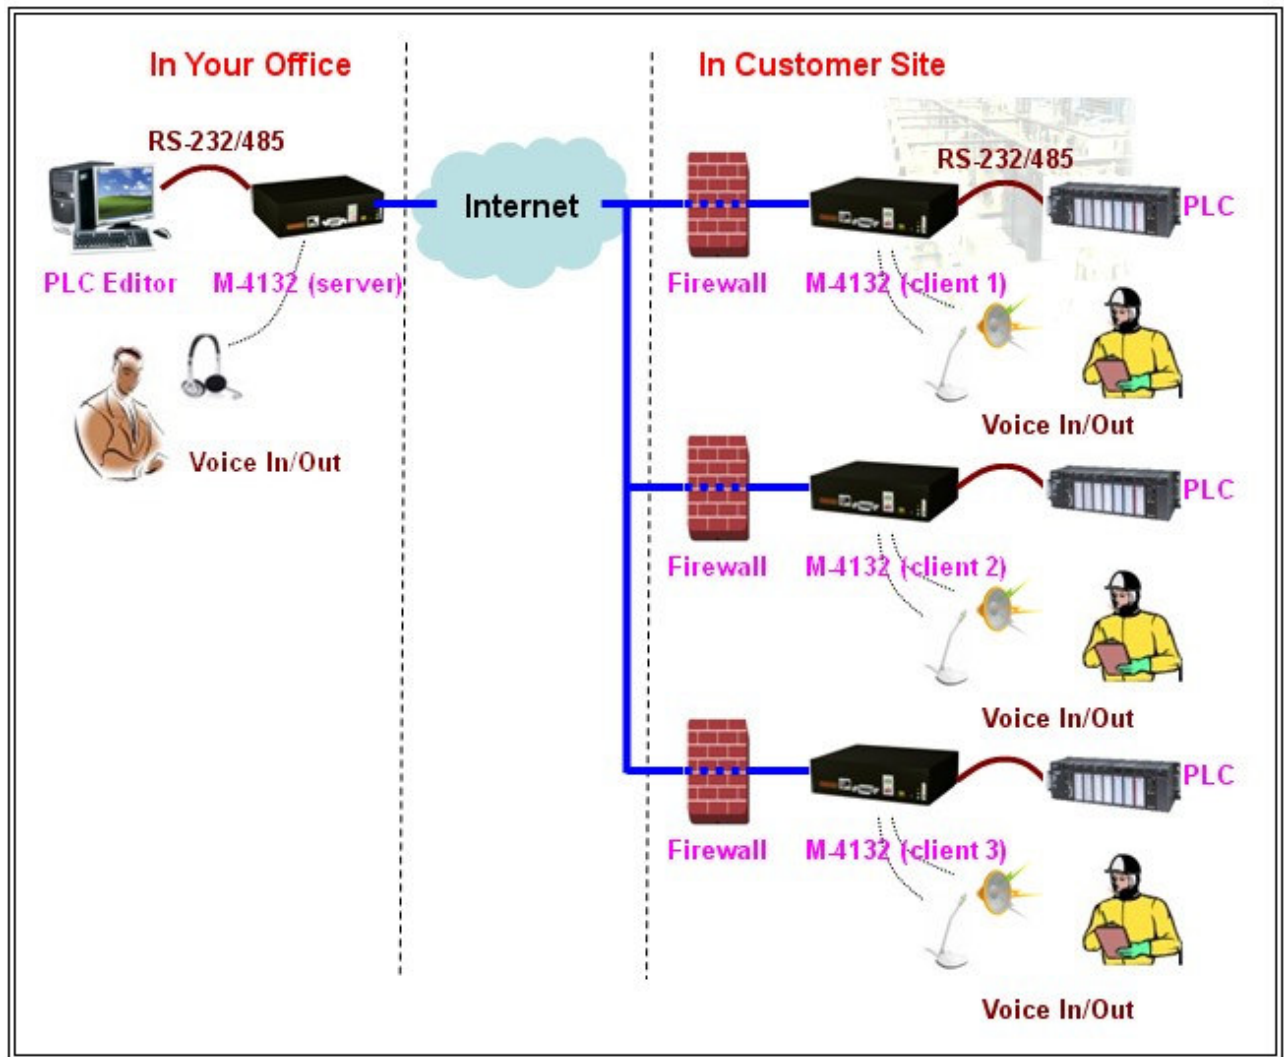

*Figure 51: Pair connection (one server to more clients)*

## 4.2 Broadcast Connection

A server can connect with one or more clients in this application. Voice collected from the server's MIC will transfer to all clients' speakers over Ethernet or Internet

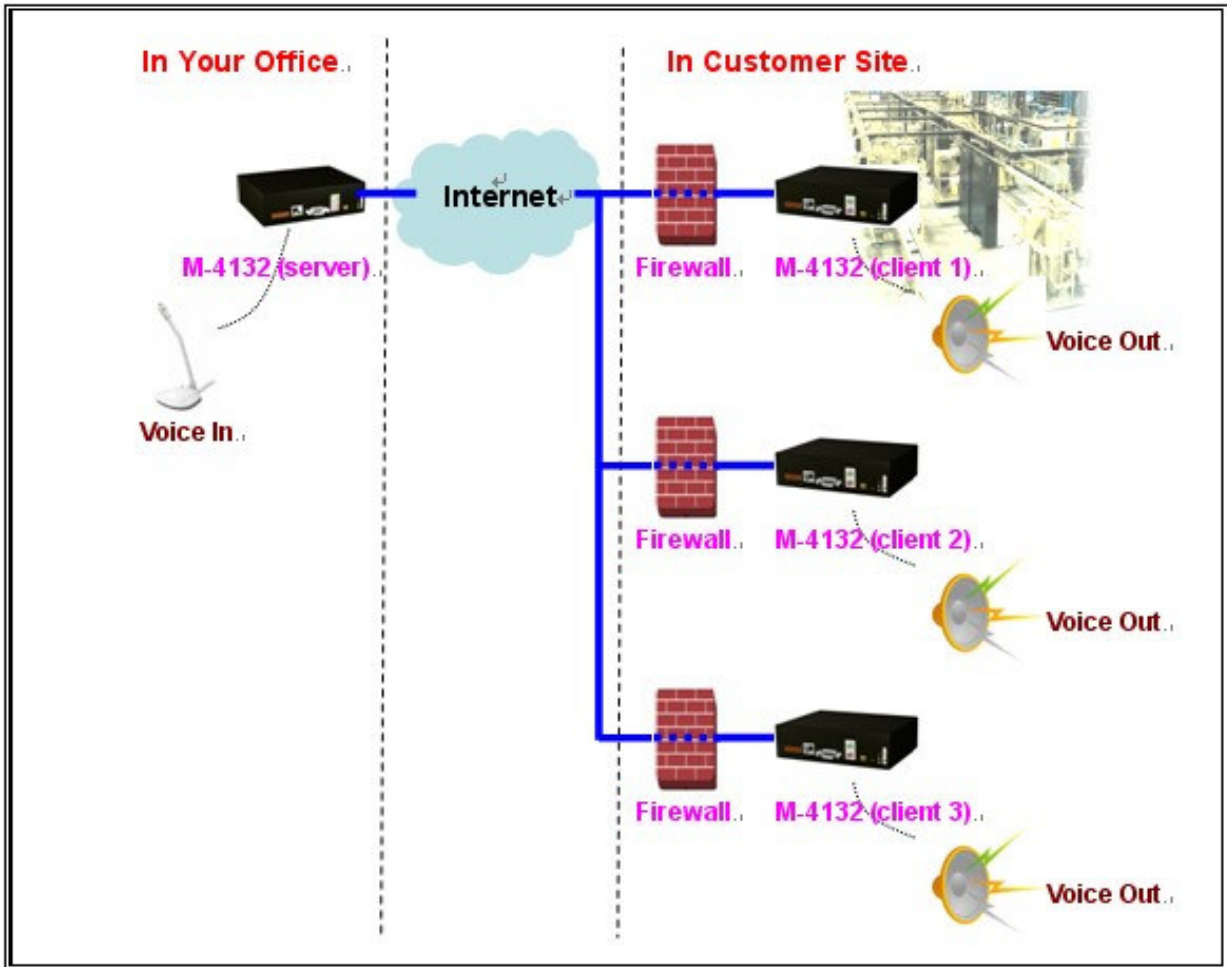


Figure 52: Broadcast connection

### 4.3 ETM Operation

A server can accept one or more clients to login, but a server can only connect with a client in this mode. Two M-4132s which are setting as Server and Client separately setup a virtual channel over Ethernet or Internet that allow bi-directional voice and Ethernet data to pass through, as shown in the below. In this mode, the user's application programming (ex: PLC editor) can connect to remote device (ex: PLC) by server and client. The remote device doesn't need any real IP at this application.

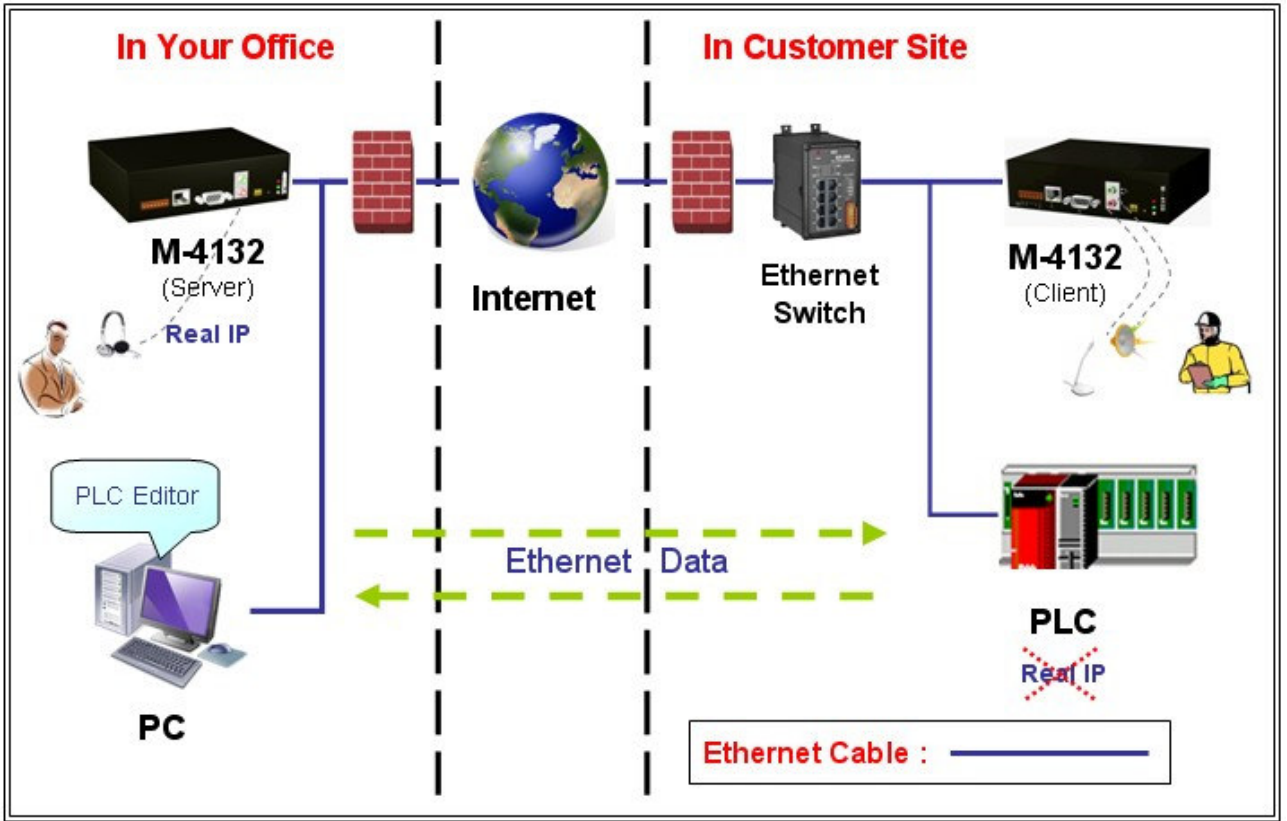


Figure 53: ETM Operation


## 5. VxComm Applications

### 5.1 Introduction

Using the VxComm (Virtual Com) technology, PC can create virtual Com Ports to map the Com Port of the M-4132. To use the VxComm application, users must install a VxComm Driver first. After installation, users can operate the virtual Com Port as a real Com Port in PC to access the serial devices connects to the M-4132. By doing this, you can operate the remote com port whatever and whenever you are.

### 5.2 Architecture

In Pair connection mode the user can operate the virtual Com Port to access the serial device connects to the M-4132 Client.

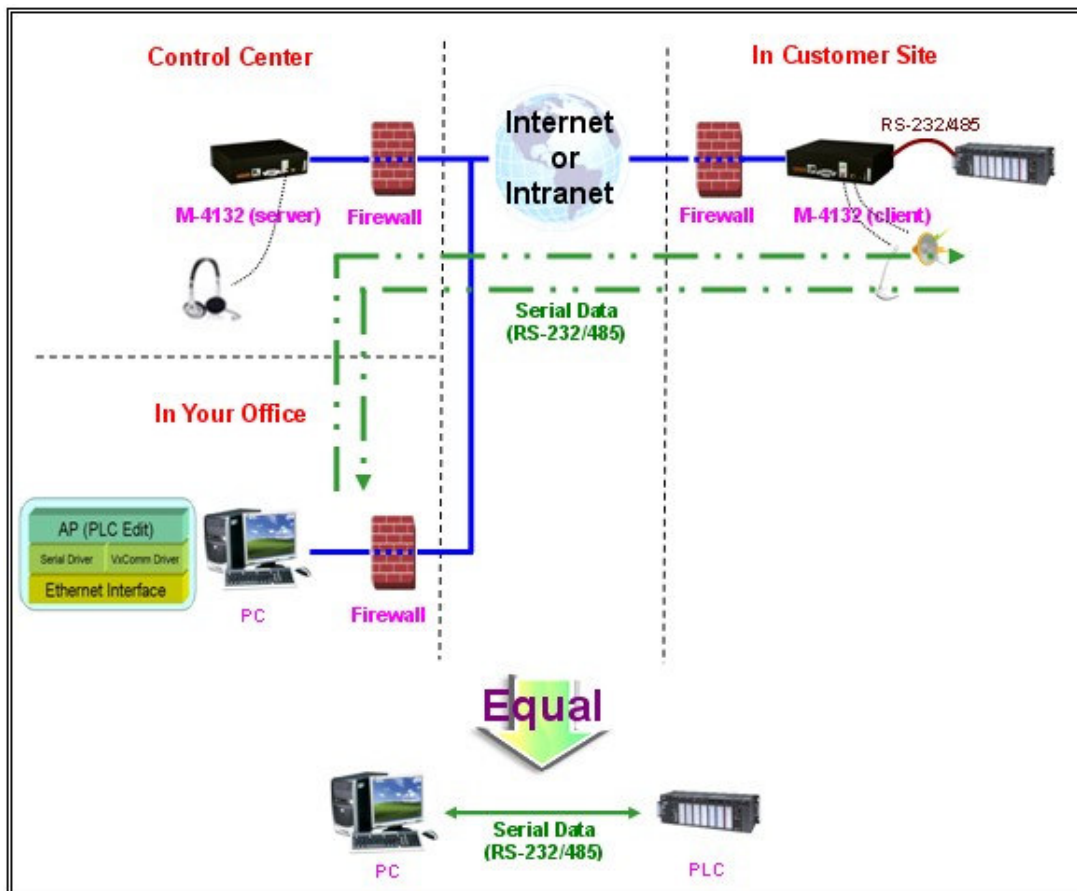

*Figure 54: VxComm Applications*

## 5.3 Installing the VxComm Driver


Step 1: The installation software can be obtained from the following location

[ftp://ftp.icpdas.com/pub/cd/8000cd/napdos/driver/vxcomm\\_driver/](ftp://ftp.icpdas.com/pub/cd/8000cd/napdos/driver/vxcomm_driver/)

Please choose the latest version that suits your Windows operation system.

- ◆ VxComm2K\_v2.9.8\_setup.exe for Windows NT4.0, 2000 /XP/2003 and Vista32 (32-bit)
- ◆ VxComm98.exe for Windows 95/98/ME

Step 2: Go the where you download the installation file, and then double-click the file in Windows to execute it.

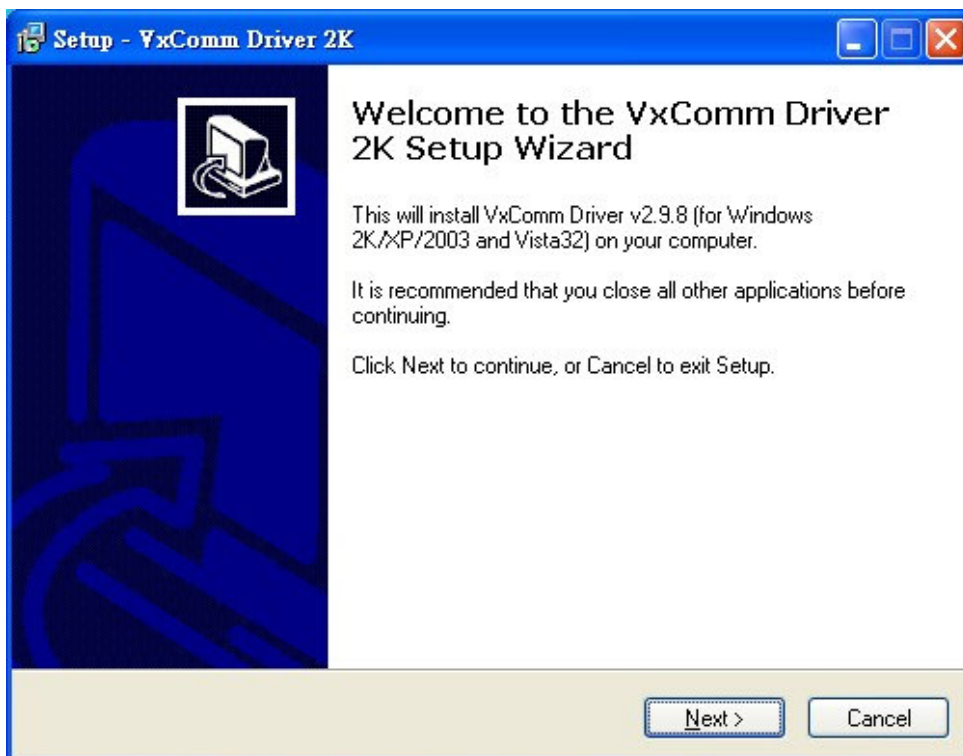

*Figure 55: VxComm Driver install*

Step 3: From the Windows Start Menu, go to Program/ICPDAS /VxComm2K/ and click the VxComm Utility.

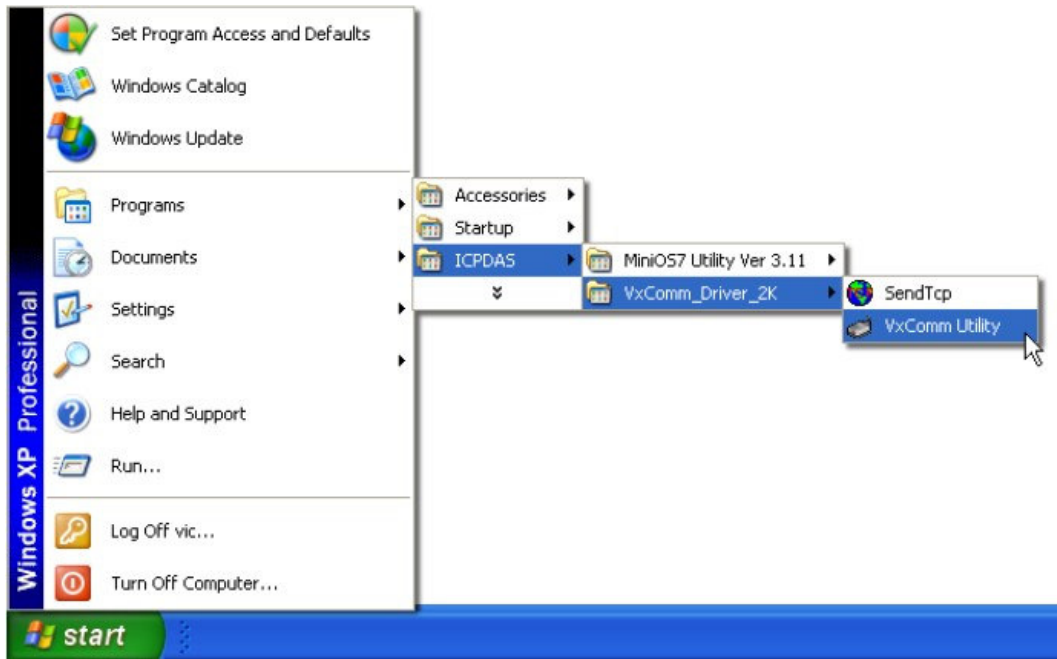


Figure 56: VxComm Utility location

Step 4: Search and add M-4132 VxComm Server.

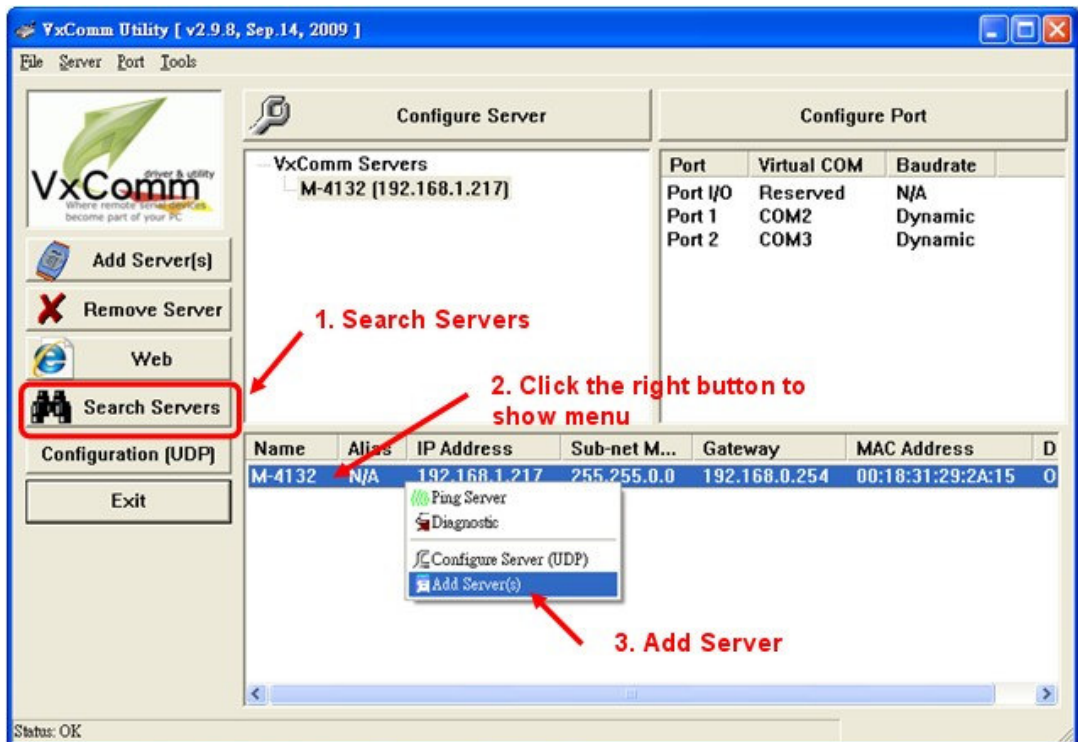


Figure 57: Search and add M-4132 VxComm Server

Step 5: Double click Port1 to open “Port Configuration” dialog and select an appropriate Com Port number.

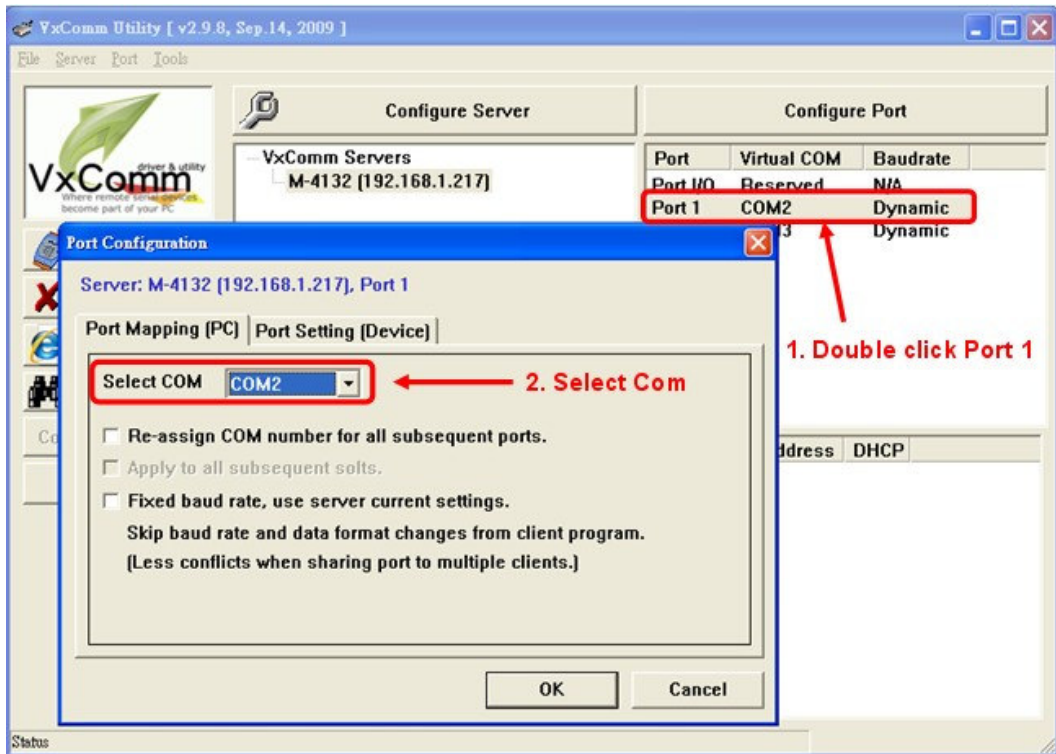


Figure 58: Select Com Port number

Step 6: Reset VxComm Driver to make the settings effectively

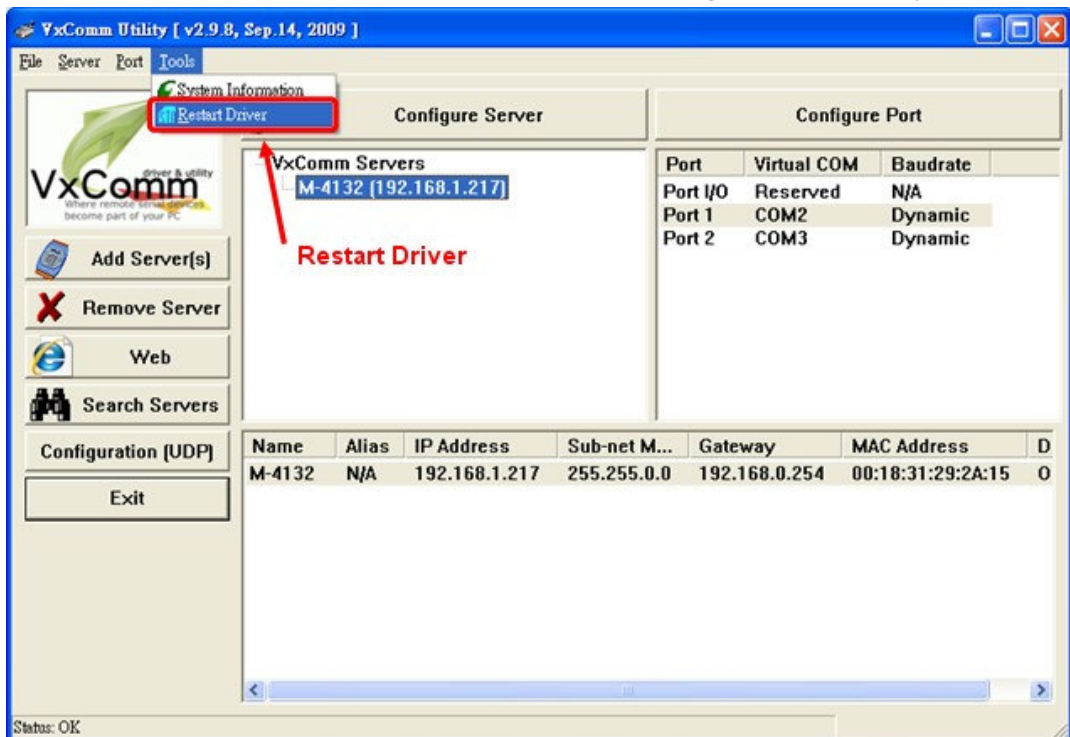


Figure 59: Reset VxComm Driver

## 5.4 VxComm communication test

Step 1: Connect M-4132 Server, Client and PC, as shown below.

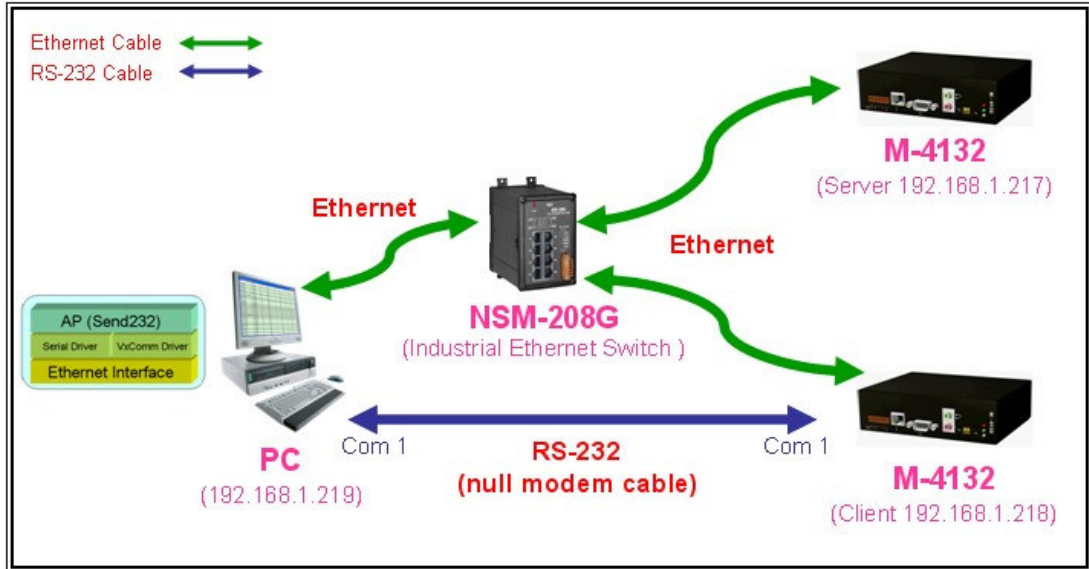


Figure 60: Communication Architecture

Step 2: Configure M-4132 Server's Port1 to PC's Com2 by VxComm Utility, please refer to section 5.3 for detail.

Step 3: Set "Local Port" = VxComm, "Remote Port" = RS232, select M-4132 Client and then click "Pair Connection" button to connect M-4132 Server and Client by web page of M-4132 Server.

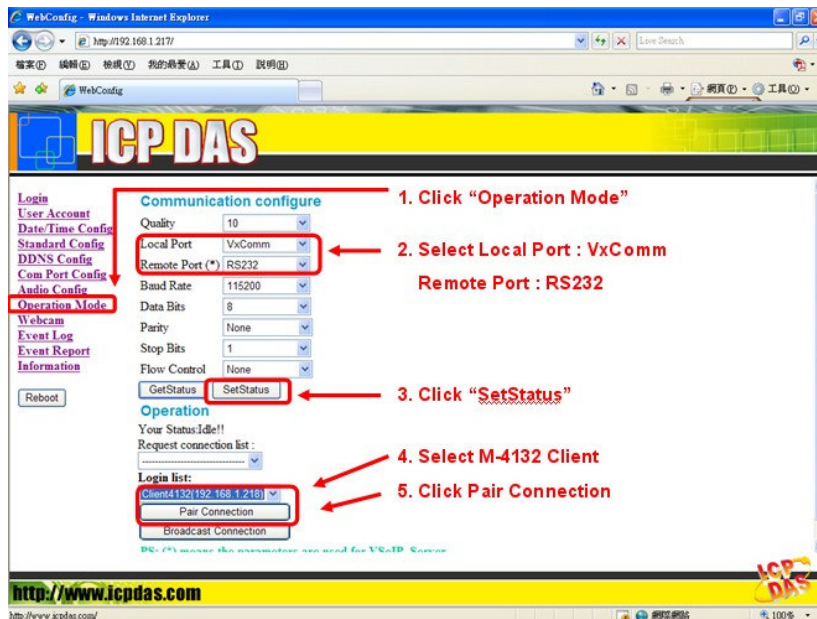


Figure 61: Web page settings



Step 4: Here we use Send232 Application (the user can download Send232 from <http://ftp.icpdas.com/pub/cd/8000cd/napdos/7188e/tcp/pcdiag/source/send232.vb6> 2.0.1) to test VxComm communication. Please open 2 Send232 Applications. One uses Com1 (connect with M-4132 Client), the other uses Com2 (provide by VxComm driver). When the user clicks “Send” button to send the message, the receive text box of the other will show the message.

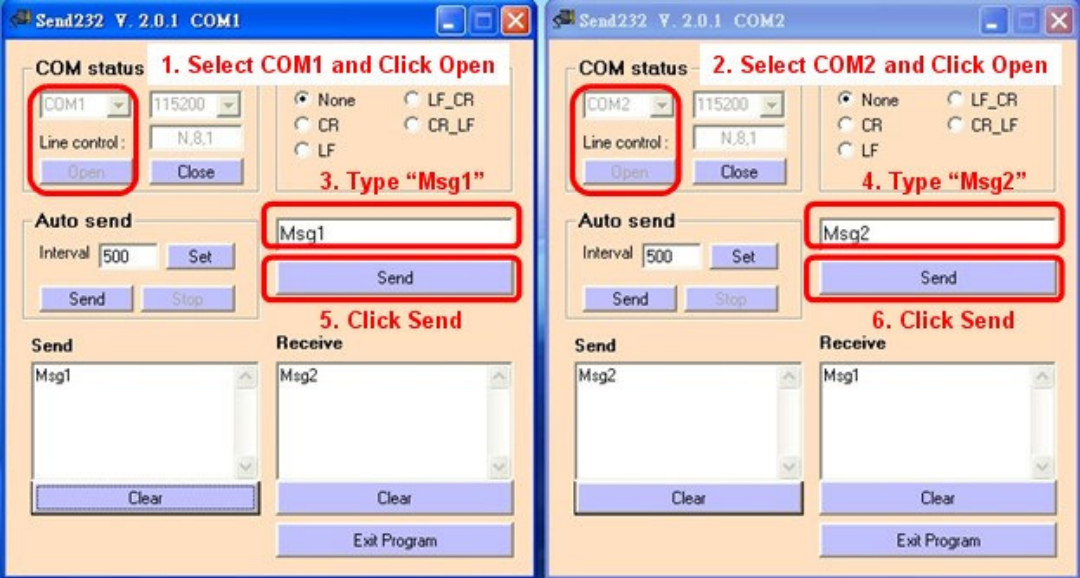


Figure 62: Communication test

## 6. Troubleshooting

The troubleshooting list can help users to resolve the problems when using the M-4132. If the problem still can't be solved, please contact with the technical staff of ICP DAS.

*Table 10 Errors and solutions*

<b>Item</b>	<b>Trouble state</b>	<b>Solution</b>
1	PWR LED indication of M-4132 is always turned off	The power supply of M-4132 has some problems. Please check the wire connection of the power and the voltage is between 10~30VDC.
2	SA1 and SA2 of M-4132 is always turned on	Application program has some errors. Please reset the M-4132 and check licence whether it is OK or not in “information” page.  Client: Please check server’s DNS and network settings whether they are all correct or not in “Standard Config” page.
3	SA1 and SA2 LED of M-4132 flash slowly at the same time and keep the state long	It means M-4132 can’t establish the connection with the other M-4132. Please check the network settings and M-4132 is working well on Ethernet.  Client: Please check server’s IP/DNS and network settings whether they are all correct or not in “Standard Config” page.
4	The audio quality of M-4132 is bad.	Please turn audio quality, output volume and input volume of server and client in “Audio Config” page.
5	M-4132 can’t send event report.	Please check the settings whether they are all correct or not in “Event Report” and “Mail Server Setting” page.


## 7. FAQ

**Q1: If I forget the M-4132's IP, how can I set and operate the M-4132 by web browser?**

**A1: You should get M-4132's IP first. It has two ways to get the IP, as shown below.**

### **I. Recover default IP provisionally.**

**Step 1: Connect PC and the M-4132 by Ethernet Switch.**

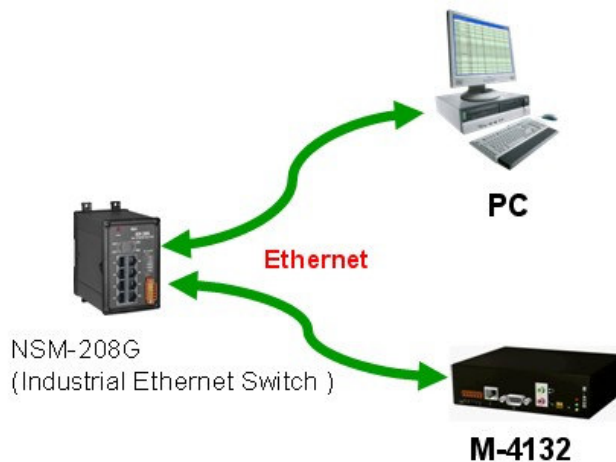


**Step 2: Set SW1=ON, SW2=OFF.**

**Step 3: Press the Trigger Button about 40 second after power on.**




**Step 4: M-4132's IP should be returned to "192.168.1.217". Please set PC's Network settings. The settings must have the same domain and different IP with the M-4132 (ex: IP=192.168.1.210, mask=255.255.255.0).**

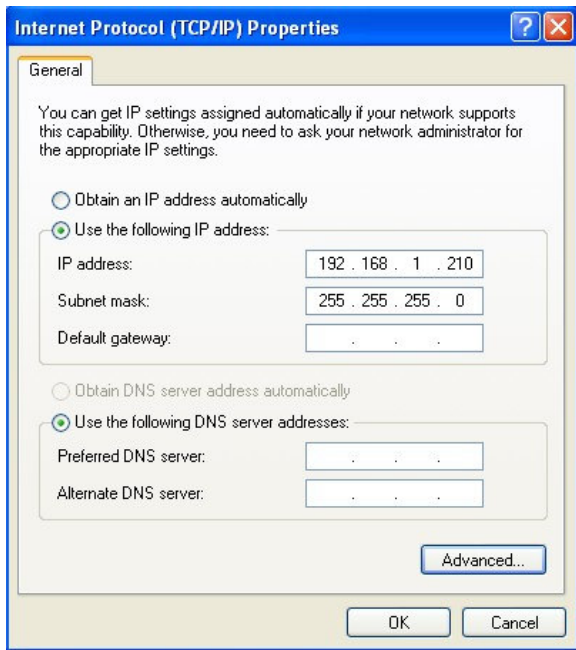


Step 5: Open web browser on PC and key in <http://192.168.1.217/main.htm> in the Address line.

Step 6: If the connection is ok, it will show “login” page at web browser. Current IP is provisional, the user can refer to the user manual section 3.3 to login and then set network setting of M-4132 at “Standard Config” page.

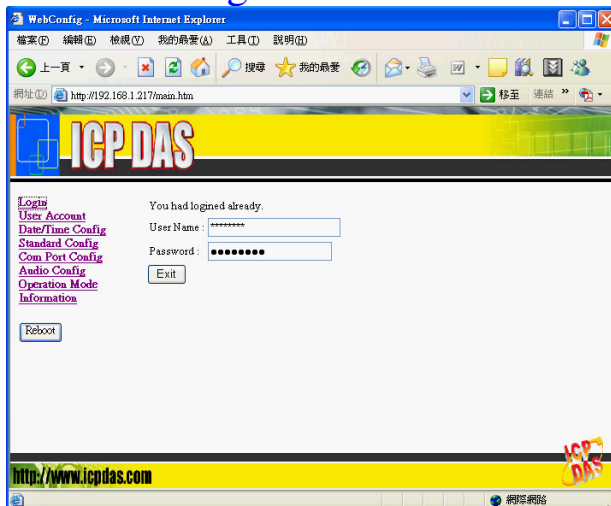


## II. Print current IP from Com Port (RS-232).

Step 1: Connect PC and the M-4132 by RS-232 cable.

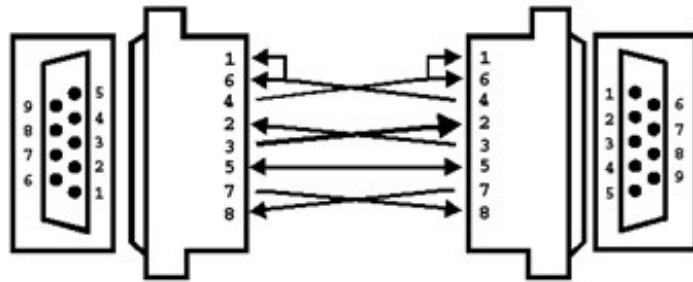


**Pinout for a 9-pin to 9-pin null modem cable**


**Step 2: Open Com Port program. We used “Hyper Terminal” of Microsoft Window XP to test here.**

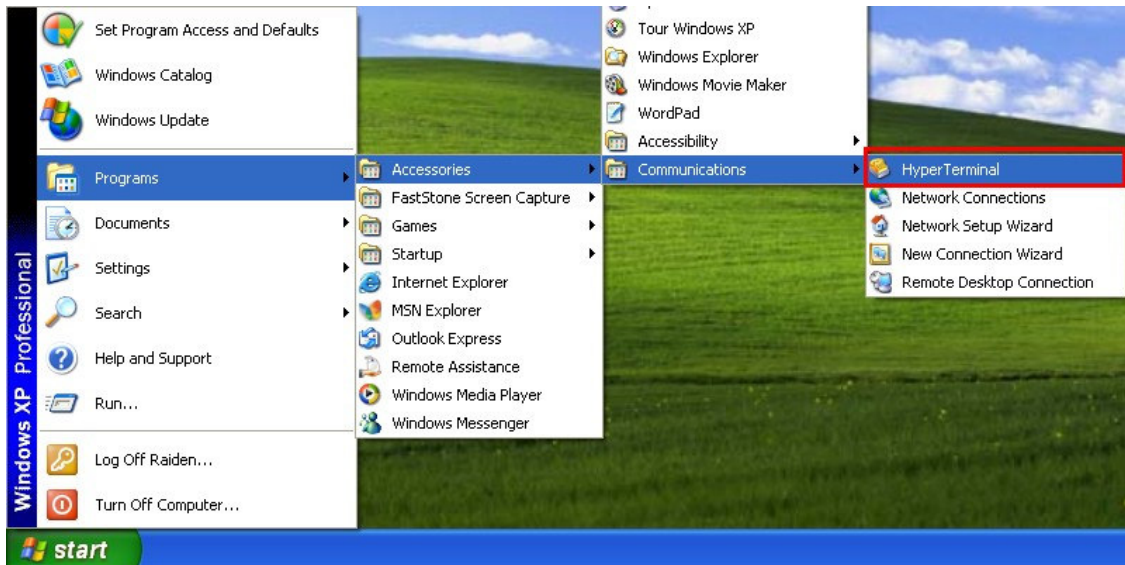

**Step 3: Set communication setting of Com Port. (baud rate = 115200, data bits=8, parity=none, stop bits=1, flow control=none).**

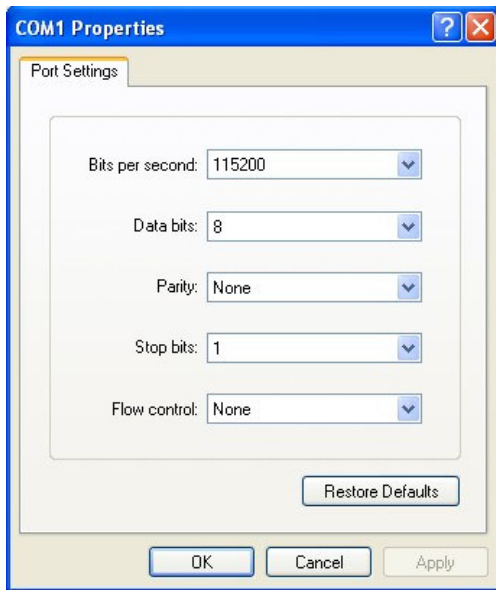

Step 4: Press Call icon.

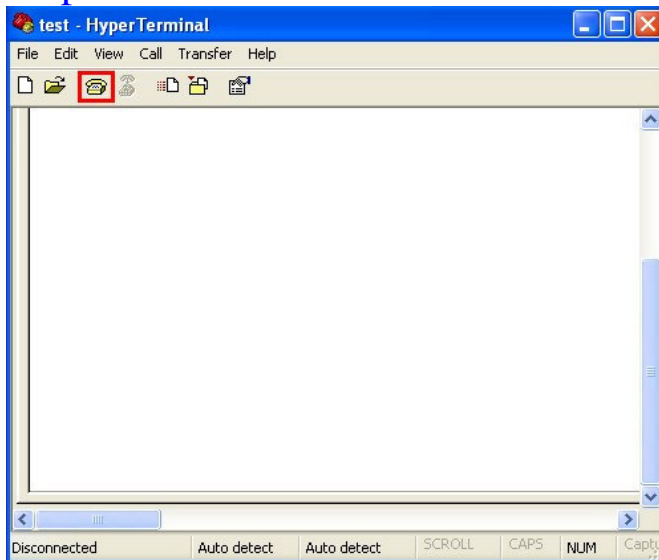


Step 5: Set SW1=OFF, SW2=OFF.


Step 6: Press the Trigger Button about 40 second after power on.




Step 7: It will show M-4132's IP in "Hyper Terminal"(ex: IP Address = 192.168.0.211).

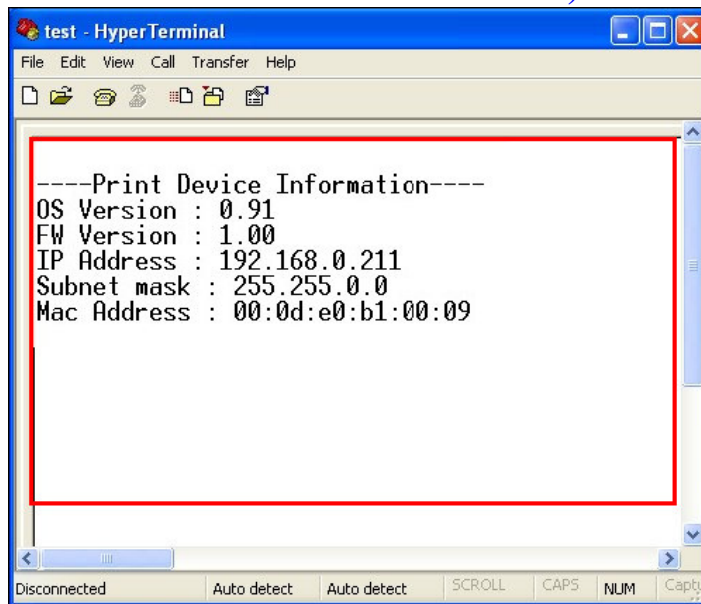

Step 8: Connect PC and the M-4132 by Ethernet Switch.

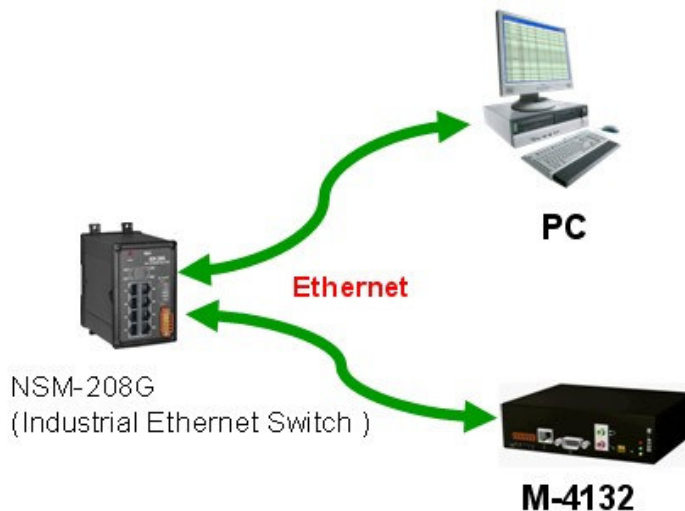


Step 9: Please set PC's Network settings. The settings must have the same domain and different IP with the M-4132 (ex: IP=192.168.0.210, mask=255.255.255.0).

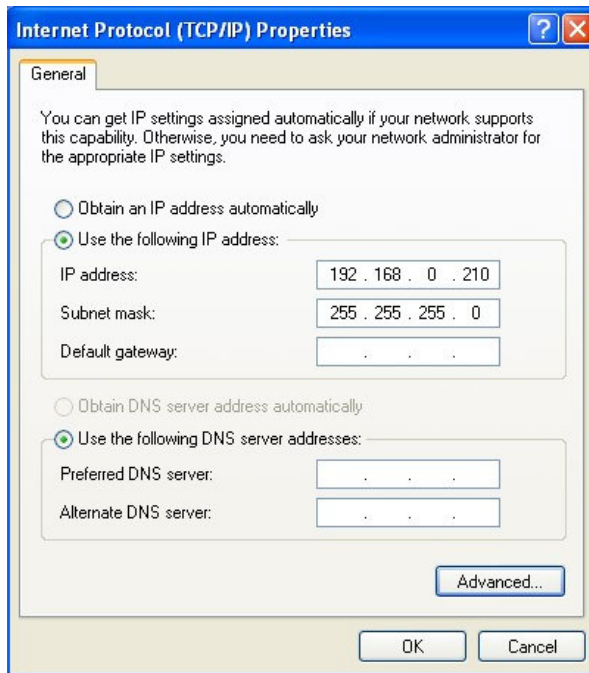

Step 10: Open web browser on PC and key in <http://ip/main.htm> (ex: <http://192.168.0.211/main.htm>) in the Address line.

Step 11: If the connection is ok, it will show “login” page at web browser.

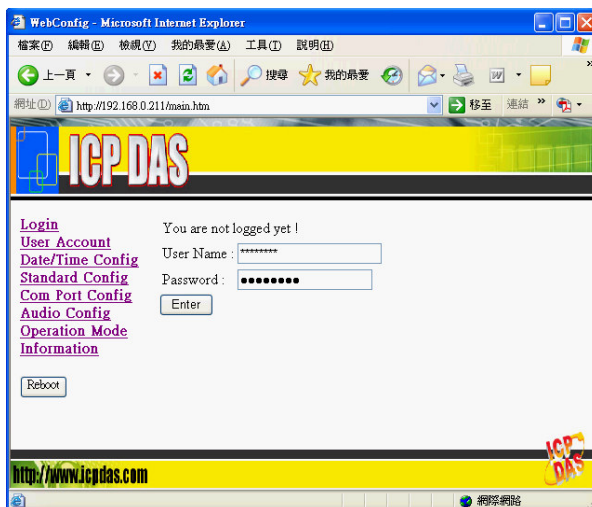


**Q2: Client can not connect to Server.**

**A2:** Please follow the following steps to check that the network configuration is correct.

Step 1: Check IP of Server and Client is the only. The IP is not the same with the other network device.



Step 2: Please confirm the network configurations are correct. The configurations include IP Address, Net Mask, Gateway and DNS Server. If the configurations are all correct, it should respond to the ping command from PC (PC's network setting must have the same domain with the Server and Client, the user can refer to user manual section 3.1 about ping IP).

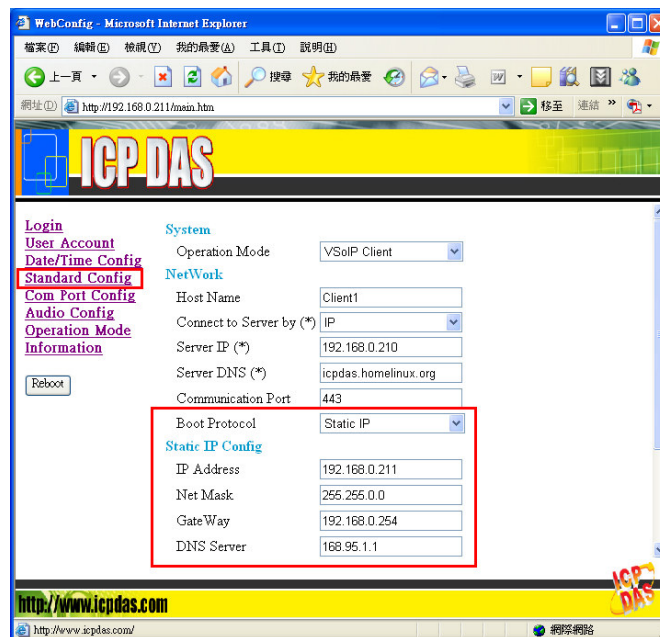

Step 3: Please confirm that the following settings are correct.

- “Server IP(\*)” of Client is the same with “IP Address” of Server.
- “Communication Port” of Server and Client are the same.
- “Operation Mode” of Client is “VSoIP Client”.
- “Operation Mode” of Server is “VSoIP Server”.

## Client's "Standard Config" page

WebConfig - Microsoft Internet Explorer  
網址: http://192.168.0.211/main.htm

**ICP-DAS**

Login  
User Account  
Date/Time Config  
Standard Config  
Com Port Config  
Audio Config  
Operation Mode  
Information

Reboot

System  
Operation Mode: VSoIP Client

Network  
Host Name: Client1  
Connect to Server by (\*): IP  
Server IP (\*): 192.168.0.210  
Server DNS (\*): icpdas.homelinux.org  
Communication Port: 443  
Boot Protocol: Static IP

Static IP Config  
IP Address: 192.168.0.211  
Net Mask: 255.255.0.0  
GateWay: 192.168.0.254  
DNS Server: 168.95.1.1

http://www.icpdas.com

## Server's "Standard Config" page

WebConfig - Microsoft Internet Explorer  
網址: http://192.168.0.210/main.htm

**ICP-DAS**

Login  
User Account  
Date/Time Config  
Standard Config  
DDNS Config  
Com Port Config  
Audio Config  
Operation Mode  
Event Log  
Event Report  
Information

Reboot

System  
Operation Mode: VSoIP Server

Network  
Host Name: Server  
Connect to Server by (\*): IP  
Server IP (\*): 220.130.62.111  
Server DNS (\*): icpdas.homelinux.org  
Communication Port: 443  
Boot Protocol: Static IP

Static IP Config  
IP Address: 192.168.0.210  
Net Mask: 255.255.0.0  
GateWay: 192.168.0.254  
DNS Server: 168.95.1.1

http://www.icpdas.com

Step 4: If Client connects to Server via internet, please confirm there is not any firewall before the Server and check network of Server and Client are available.

The user can open web browser and key in `http://ip/cgi-bin/Ping.cgi` (ex: `http://192.168.0.211/cgi-bin/Ping.cgi`) in the Address line and press "Start" button to test the network. If the network is available, it will show "0% packet loss".

## Ping Command

Ping (IP or Domain name) :

```
PING google.com (64.233.189.104): 56 data bytes
64 bytes from 64.233.189.104: icmp_seq=0 ttl=52 time=64.2 ms
64 bytes from 64.233.189.104: icmp_seq=1 ttl=52 time=62.0 ms
64 bytes from 64.233.189.104: icmp_seq=2 ttl=52 time=61.9 ms
64 bytes from 64.233.189.104: icmp_seq=3 ttl=52 time=60.1 ms


--- google.com ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 60.1/62.0/64.2 ms
```

**Note:** This command can help user to test the network ability.  
If the network is available, it will show '4 packets transmitted, 4 packets received, 0% packet loss'.


**Q3: Server and Client can't establish Com Port connection.**

**A3: Please follow the steps to check below.**

Step 1: Confirm Client has already login the Server and the user can find the host name of Client in the "Login list" at Server's "Operation Mode" page..

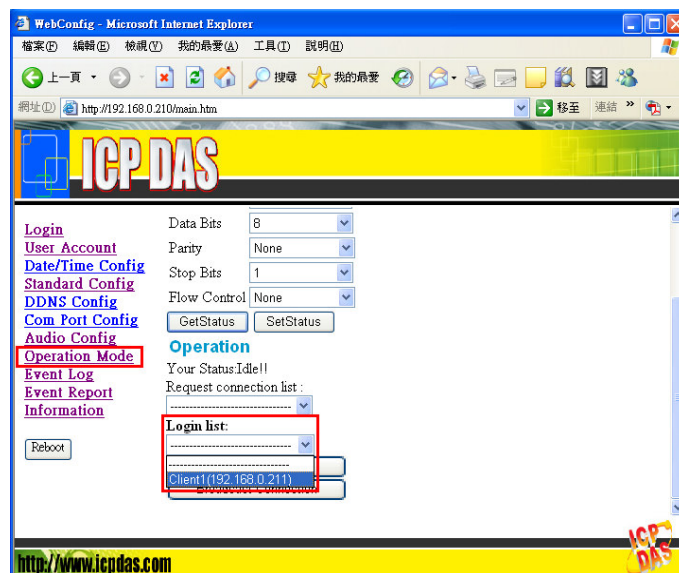


Step 2: Confirm Server and Client are at "Pair Connection" mode and it shows "Your Status: Pair Connection with Client (IP)" at Server's "Operation Mode" page.

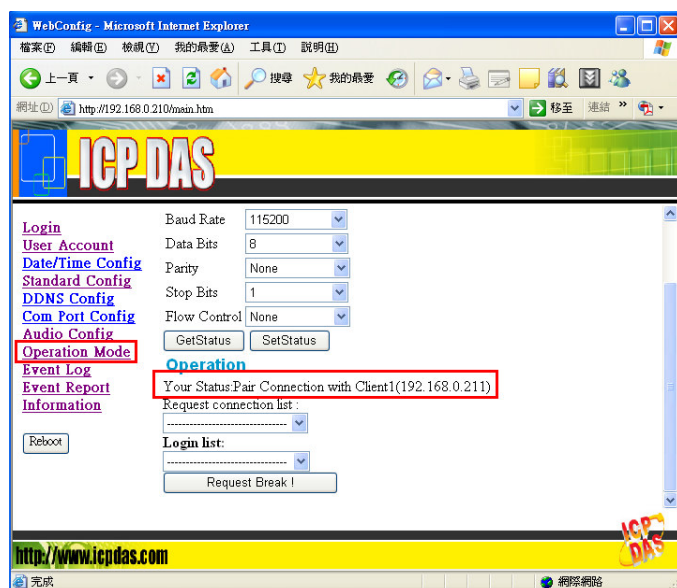

Step 3: Confirm that the Com Port devices is connected with Server and Client has the same communication settings with Server’s “Operation Mode” page. If it is different, please break the connection and change the settings then reconnect the client.



### Server’s “Operation Mode” page

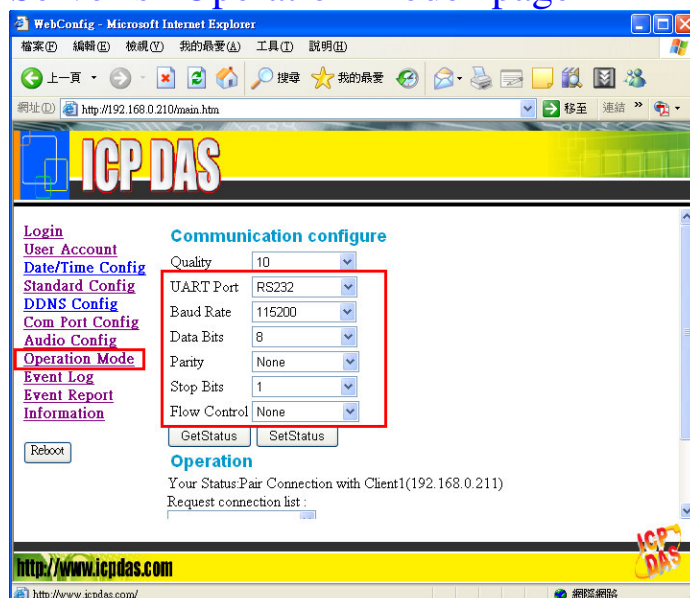

Step 4: Confirm the Cable connected Server/Client to Com Port device is wired correctly. If the connection is RS485, the user

can refer to user manual section 2.2.2. If the connection is RS-232 and the Com Port device is a data circuit-terminating equipment (DCE), the user just needs to match the signal names to connect Server/Client to Com Port device, else the user needs to use a crossover cable to connect.

Some Com Port devices will wait forever for one of the handshaking lines to go to the correct level. Depending on the signal state it might sometimes work, other times it might not. Here we connect the M-4132 and the Com Port device via handshake looped to avoid the Com Port device waits handshake line signals, as shown in below.

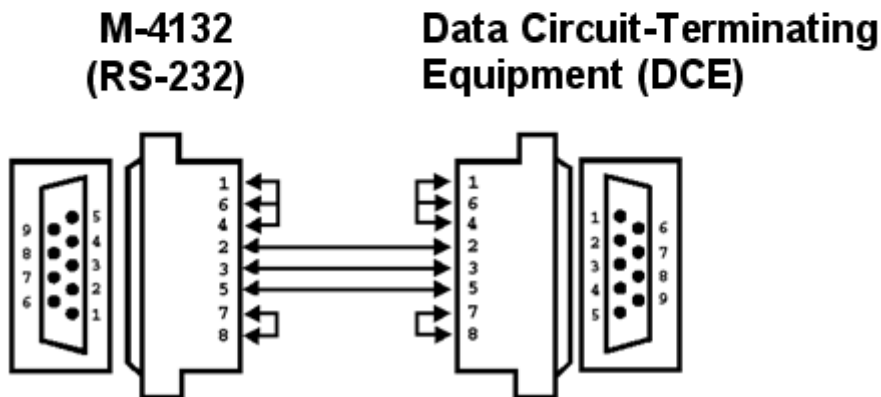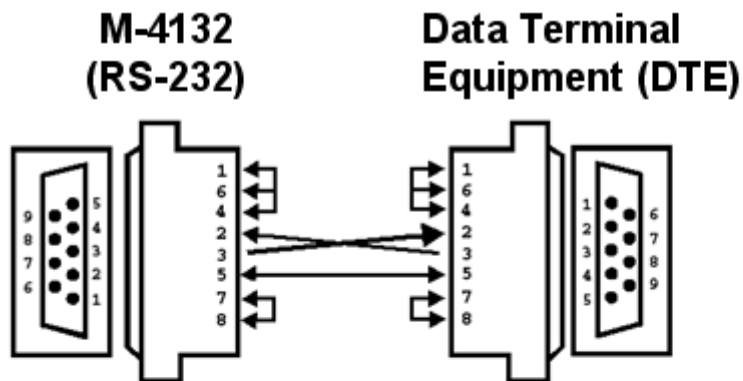

## 8. Dimensions

(Unit: mm)

